


MG800RW Series

Compact, 8W 2:1 Input, MiniDIP DC/DC Converters

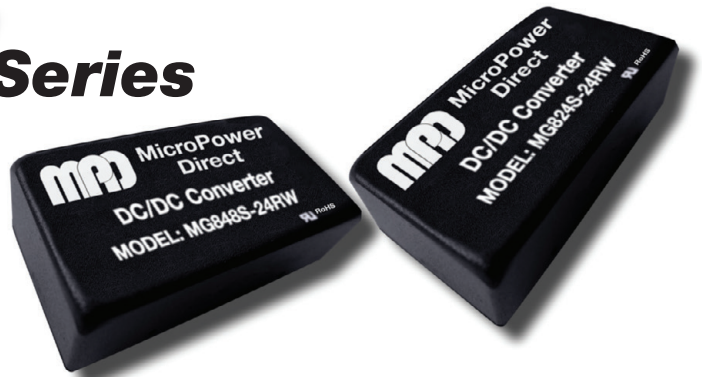

Key Features:

- 8W Output Power
- Very Small MiniDIP Case
- EN 60950 Approved
- Wide 2:1 Input Range
- High Efficiency
- 1,500 VDC Isolation
- Single and Dual Outputs
- >1.0 MHour MTBF
- -40°C to +80°C Operation
- LOW COST



MicroPower Direct

292 Page Street
Suite D
Stoughton, MA 02072
USA

T: (781) 344-8226

F: (781) 344-8481

E: sales@micropowerelectronics.com

W: www.micropowerelectronics.com



Electrical Specifications

Specifications typical @ +25°C, nominal input voltage & rated output current, unless otherwise noted. Specifications subject to change without notice.

Input						
Parameter	Conditions	Min.	Typ.	Max.	Units	
Input Voltage Range	12 VDC Input	9.0	12.0	18.0	VDC	
	24 VDC Input	18.0	24.0	36.0		
	48 VDC Input	36.0	48.0	75.0		
Input Start-up Threshold	12 VDC Input			9.0	VDC	
	24 VDC Input			18.0		
	48 VDC Input			36.0		
Under Voltage Shutdown	12 VDC Input		8.0		VDC	
	24 VDC Input		16.0			
	48 VDC Input		34.0			
Input Filter	π (Pi) Filter					
Output						
Parameter	Conditions	Min.	Typ.	Max.	Units	
Output Voltage Accuracy				±2.0	%	
Output Voltage Balance	Dual Output, Balanced Loads		±1.0	±2.0	%	
Line Regulation	V _{IN} = Min To Max		±0.2	±0.8	%	
Load Regulation	I _{OUT} = 0% To 100%		±0.5	±1.0	%	
Ripple & Noise (20 MHz)	See Note 2			55	mV P - P	
Transient Recovery Time				500	µSec	
Transient Response Deviation	See Note 3		±3.0	±5.0	%	
Overload Protection	See Note 4	150			%	
Temperature Coefficient			±0.01	±0.02	%/°C	
Output Short Circuit	See Note 5		Continuous (Autorecovery)			
General						
Parameter	Conditions	Min.	Typ.	Max.	Units	
Isolation Voltage	60 Seconds	1,500			VDC	
	1 Second	1,800				
Isolation Resistance	500 VDC	1,000			MΩ	
Isolation Capacitance	100 kHz, 1V		500		pF	
Switching Frequency			370		kHz	
Environmental						
Parameter	Conditions	Min.	Typ.	Max.	Units	
Operating Temperature Range	Ambient	-40	+25	+80	°C	
Max Case Temperature				+105	°C	
Storage Temperature Range		-50		+125	°C	
Cooling	Free Air Convection					
Humidity	RH, Non-condensing			95	%	
Physical						
Case Size	See Mechanical Diagram (Page 3)					
Case Material	Aluminum Alloy, Black Anodized Coating (UL-94V0)					
Weight	0.20 Oz (6.1g)					
Reliability Specifications						
Parameter	Conditions	Min.	Typ.	Max.	Units	
MTBF	MIL HDBK 217F, 25°C, Gnd Benign	1.06			MHours	
Safety Standards	UL 60950, EN 60950					
Absolute Maximum Ratings						
Parameter	Conditions	Min.	Typ.	Max.	Units	
Input Voltage Surge (1 Sec)	12 VDC Input			25.0	VDC	
	24 VDC Input			50.0		
	48 VDC Input			100.0		
Lead Temperature	1.5 mm From Case For 10 Sec			260	°C	

Caution: Exceeding Absolute Maximum Ratings may damage the module. These are not continuous operating ratings.

www.micropowerelectronics.com

Model Selection Guide

Model Number	Input				Output			Output Capacitive Load (μF Max)	Efficiency (% Typ)	Fuse Rating Slow-Blow (mA)
	Voltage (VDC)		Current (mA)		Voltage (VDC)	Current (mA, Max)	Current (mA, Min)			
	Nominal	Range	Full-Load	No-Load						
MG812S-03RW	12	9.0 - 18.0	564	10	3.3	1,600	0.0	680	78	1,600
MG812S-05RW	12	9.0 - 18.0	823	10	5.0	1,600	0.0	680	81	1,600
MG812S-12RW	12	9.0 - 18.0	792	10	12.0	665	0.0	330	84	1,600
MG812S-15RW	12	9.0 - 18.0	796	10	15.0	535	0.0	330	84	1,600
MG812S-24RW	12	9.0 - 18.0	788	10	24.0	335	0.0	150	85	1,600
MG812D-12RW	12	9.0 - 18.0	788	10	± 12.0	± 335	± 0.0	150	85	1,600
MG812D-15RW	12	9.0 - 18.0	789	10	± 15.0	± 265	± 0.0	150	84	1,600
MG824S-03RW	24	18.0 - 36.0	282	10	3.3	1,600	0.0	680	78	800
MG824S-05RW	24	18.0 - 36.0	407	10	5.0	1,600	0.0	680	82	800
MG824S-12RW	24	18.0 - 36.0	391	10	12.0	665	0.0	330	85	800
MG824S-15RW	24	18.0 - 36.0	393	10	15.0	535	0.0	330	85	800
MG824S-24RW	24	18.0 - 36.0	390	10	24.0	335	0.0	150	86	800
MG824D-12RW	24	18.0 - 36.0	394	10	± 12.0	± 335	± 0.0	150	85	800
MG824D-15RW	24	18.0 - 36.0	385	10	± 15.0	± 265	± 0.0	150	86	800
MG848S-03RW	48	36.0 - 75.0	141	8	3.3	1,600	0.0	680	78	400
MG848S-05RW	48	36.0 - 75.0	206	8	5.0	1,600	0.0	680	81	400
MG848S-12RW	48	36.0 - 75.0	196	8	12.0	665	0.0	330	85	400
MG848S-15RW	48	36.0 - 75.0	197	8	15.0	535	0.0	330	85	400
MG848S-24RW	48	36.0 - 75.0	195	8	24.0	335	0.0	150	86	400
MG848D-12RW	48	36.0 - 75.0	195	8	± 12.0	± 335	± 0.0	150	86	400
MG848D-15RW	48	36.0 - 75.0	193	8	± 15.0	± 265	± 0.0	150	86	400

Notes:

- The specified maximum capacitive load is for each output.
- When measuring output ripple, it is recommended that an external $0.47 \mu\text{F}$ ceramic capacitor be placed in parallel from the +Vout pin to the -Vout pin for single output models, or from each output to common for dual output models.
- Transient recovery is measured to within a 1% error band for a load step change of 25%.
- Output overload protection is provided by a Hiccup circuit with auto-recovery.
- Output short circuit protection is provided by a Hiccup circuit with auto-recovery.
- These converters are specified for operation without external components. However, in some applications the addition of input/output capacitors, as shown in the typical connection diagram at right, will enhance stability and reduce output ripple. This simple connection includes a low ESR ($< 1\Omega$ at 100 kHz) capacitor connected across the input. It is recommended that a $3.3 \mu\text{F}$ be used for 12V input models and a $2.2 \mu\text{F}$ be used for 24V & 48V input units. To improve the output ripple performance, a $3.3 \mu\text{F}$ is connected across the output. For dual output units, a $3.3 \mu\text{F}$ capacitor should be connected from each output to common. For applications where the circuit must meet or exceed EN 61000-4-4 (5), refer to the note under the typical connection diagram.
- Operation at no load will not damage these units, however, they may not meet all specifications.
- It is recommended that a fuse be used on the input of a power supply for protection. See the Model Selection table above for the correct rating.

Typical Connection

EMI Characteristics			
Parameter	Standard	Criteria	Level
Radiated Emissions	EN 55014, EN 55024		Class A
Conducted Emissions	EN 55022		Class A
ESD	EN 61000-4-2	A	± 8 kV Air ± 6 kV Contact
RS	EN 61000-4-3	A	10V/m
EFT, See Note 6	EN 61000-4-4	A	± 2 kV
Surge, See Note 6	EN 61000-4-5	A	± 1 kV
CS	EN 61000-4-6	A	10 Vrms
PFMF	EN 61000-4-8	A	3A/m


Typical Connection



Notes:



To meet the specified EN 61000-4-4 and EN 61000-4-5 limits, an external capacitor must be connected across the input pins of the module (C1). A $220 \mu\text{F}/100\text{V}$ capacitor is recommended. This capacitor should be mounted as close to the module as possible.

Derating Curve

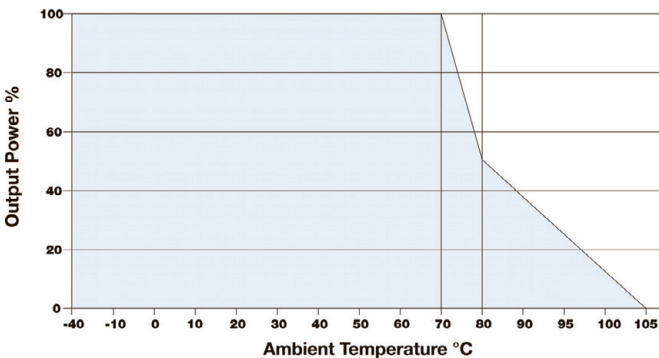

Mechanical Dimensions

www.micropowerdirect.com

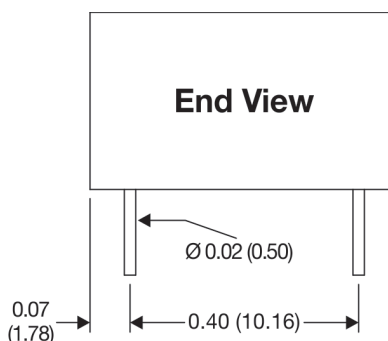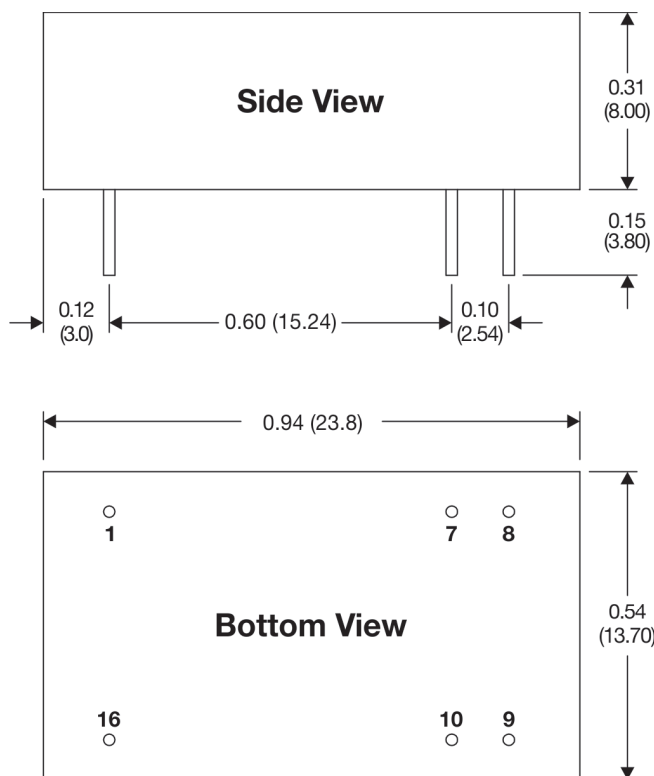

Pin Connections

Pin	Single	Dual
1	-VIN	-VIN
7	NC	NC
8	NC	Common
9	+VOUT	+VOUT
10	-VOUT	-VOUT
16	+VIN	+VIN

NC = No Connection

Notes:

- All dimensions are typical in inches (mm)
- Tolerance x.xx = ± 0.02 (± 0.50)
- Pin 1 is marked by a "dot" or indentation on the unit

Related Product

MG800RU Series

Miniature 8W, 4:1 Input DC/DC's

Key Features:

- 8W Output Power
- Very Small MiniDIP Case
- EN 60950 Approved
- Wide 4:1 Input Range
- High Efficiency
- 1,500 VDC Isolation
- Single and Dual Outputs
- >1.0 MHour MTBF
- -40°C to +80°C Operation
- LOW COST



Thousands of standard DC/DC's ranging from 0.5W to 60W are available from MPD in a wide variety of packages and pin-outs

MPD MicroPower Direct
We Power Your Success - For Less!

292 Page Street Ste D Stoughton, MA 02072 • TEL: (781) 344-8226 • FAX: (781) 344-8481 • E-Mail: sales@micropowerdirect.com