


MD100MEHI Series

Miniature, 1W SIP Medical Approved DC/DC Converters

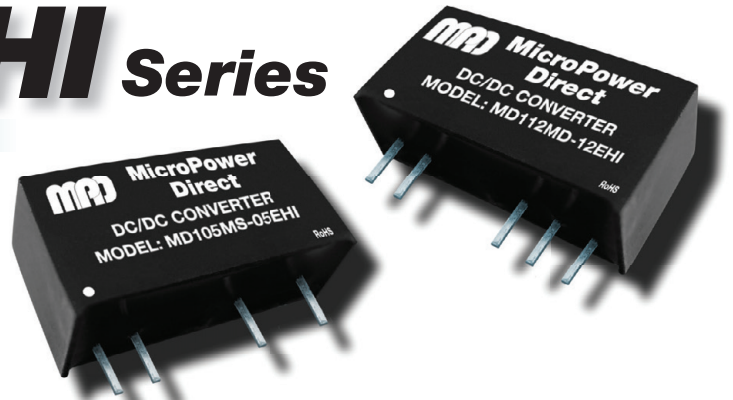

Key Features:

- 1W Output Power
- 4.2 kVAC rms Isolation
- Reinforced Insulation
- Miniature SIP Case
- Single & Dual Outputs
- 1xMOPP/2XMOOP
- -40 to +85°C Operation
- Leakage Current 2 μ A Max
- EN 60601 Approved



MicroPower Direct

292 Page Street
Suite D
Stoughton, MA 02072
USA

T: (781) 344-8226

F: (781) 344-8481

E: sales@micropowerdirect.com

W: www.micropowerdirect.com



Electrical Specifications

Specifications typical @ +25°C, nominal input voltage & rated output current, unless otherwise noted. Specifications subject to change without notice.

Input					
Parameter	Conditions	Min.	Typ.	Max.	Units
Input Voltage Range	5 VDC Input	4.5	5.0	5.5	VDC
	12 VDC Input	10.8	12.0	13.2	
	24 VDC Input	21.6	24.0	26.4	
Input Filter	Capacitor Filter				
Reflected Ripple Current			0.2		A
Output					
Parameter	Conditions	Min.	Typ.	Max.	Units
Output Voltage Accuracy			± 5.0		%
Line Regulation	V_{IN} Change of 1%			± 1.5	%
	3.3 V _{OUT}			± 1.2	
Load Regulation, See Note 1	3.3/5.0 V _{OUT}			20	%
	All Other Models			15	
Efficiency	See Model Selection Guide				
Ripple & Noise (20 MHz), See Note 2	3.3 V _{OUT}		80	150	mV P - P
	All Other Models		70	120	
Temperature Coefficient			± 0.02		%/°C
Output Short Circuit	See Note 3			3.0	S
General					
Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation Voltage	60 Seconds	4,200			VAC
		6,000			VDC
Leakage Current, See Note 4	250 VAC, 50/60 Hz			2.0	μ A
Isolation Resistance	500 VDC	1.0			G Ω
Isolation Capacitance	100 kHz, 0.1V		5		pF
Switching Frequency			100		kHz
EMI Characteristics, See Note 6					
Parameter	Standard	Criteria	Level		
Radiated Emissions	EN 55022		Level B		
Conducted Emissions	EN 55022		Level B		
ESD	EN 61000-4-2	B	± 8 kV Contact		
Environmental , See Note 7					
Parameter	Conditions	Min.	Typ.	Max.	Units
Operating Temperature Range	Ambient	-40		+85	°C
Storage Temperature Range		-55		+125	°C
Cooling	Free Air Convection				
Humidity	RH, Non-condensing			95	%
Physical					
Case Size	See Mechanical Diagram (Page 3)				
Case Material	Non-Conductive Black Plastic (UL94-V0)				
Weight	0.14 Oz (4.2g)				
Reliability Specifications					
Parameter	Conditions	Min.	Typ.	Max.	Units
MTBF	MIL HDBK 217F, 25°C, Gnd Benign	3.5			MHours
Transformer Creepage		5.0			mm
Transformer Clearance		5.0			mm
PCB Creepage & Clearance		5.5			mm
Safety Approvals, See Note 5	UL 60601-1, EN 60601-1 3rd Edition, UL 60950, EN 60950 ANSI/AAMI ES 60601-1 1xMOPP & 2XMOOP Recognition				
Absolute Maximum Ratings					
Parameter	Conditions	Min.	Typ.	Max.	Units
Input Voltage Surge (1 Sec)	5 VDC Input			9.0	VDC
	12 VDC Input			18.0	
	24 VDC Input			30.0	
Lead Temperature	1.5 mm From Case For 10 Sec			300	°C

Caution: Exceeding Absolute Maximum Ratings may damage the module. These are not continuous operating ratings.


www.micropowerdirect.com

Model Number	Input				Output			Capacitive Load (μF, Max)	Efficiency (% Typ)	Fuse Rating Slow-Blow (mA)
	Voltage (VDC)		Current (mA)		Voltage (VDC)	Current (mA, Max)	Current (mA, Min)			
	Nominal	Range	Full-Load	No-Load						
MD105MS-03EHI	5	4.5 - 5.5	274	35	3.3	303.0	31.0	1,000	73	500
MD105MS-05EHI	5	4.5 - 5.5	256	35	5.0	200.0	20.0	1,000	78	500
MD105MS-12EHI	5	4.5 - 5.5	263	35	12.0	84.0	9.0	470	76	500
MD105MS-15EHI	5	4.5 - 5.5	263	35	15.0	67.0	7.0	470	76	500
MD105MD-05EHI	5	4.5 - 5.5	256	35	±5.0	±100.0	±10.0	470	78	500
MD105MD-09EHI	5	4.5 - 5.5	250	35	±9.0	±56.0	±6.0	470	80	500
MD105MD-12EHI	5	4.5 - 5.5	270	35	±12.0	±42.0	±5.0	220	74	500
MD105MD-15EHI	5	4.5 - 5.5	270	35	±15.0	±34.0	±4.0	220	76	500
MD112MS-05EHI	12	10.8 - 13.2	108	15	5.0	200.0	20.0	1,000	77	200
MD112MS-12EHI	12	10.8 - 13.2	103	15	12.0	84.0	9.0	470	81	200
MD112MS-15EHI	12	10.8 - 13.2	103	15	15.0	67.0	7.0	470	81	200
MD112MD-05EHI	12	10.8 - 13.2	108	15	±5.0	±100.0	±10.0	470	77	200
MD112MD-09EHI	12	10.8 - 13.2	104	15	±9.0	±56.0	±6.0	470	80	200
MD112MD-12EHI	12	10.8 - 13.2	114	15	±12.0	±42.0	±5.0	220	73	200
MD112MD-15EHI	12	10.8 - 13.2	111	15	±15.0	±34.0	±4.0	220	75	200
MD124MS-05EHI	24	21.6 - 26.4	55	10	5.0	200.0	20.0	1,000	76	100
MD124MS-12EHI	24	21.6 - 26.4	53	10	12.0	84.0	9.0	470	78	100
MD124MS-15EHI	24	21.6 - 26.4	53	10	15.0	67.0	7.0	470	78	100
MD124MD-05EHI	24	21.6 - 26.4	55	10	±5.0	±100.0	±10.0	470	75	100
MD124MD-09EHI	24	21.6 - 26.4	53	10	±9.0	±56.0	±6.0	470	79	100
MD124MD-12EHI	24	21.6 - 26.4	55	10	±12.0	±42.0	±5.0	220	76	100
MD124MD-15EHI	24	21.6 - 26.4	55	10	±15.0	±34.0	±4.0	220	76	100

Notes:

- Output load regulation is specified for a load change of 10% to 100%.
- When measuring output ripple, it is recommended that an external 1.0 μF ceramic capacitor and a 10 μF electrolytic capacitor be connected in parallel from the +Vout pin to the -Vout pin for single output models, or from each output to common for dual output models.
- In the event of an output short circuit that lasts less than 3 seconds, the unit must be restarted.
- Patient leakage current and reinforced insulation is based on a 250 VAC, 50/60 Hz system input voltage.
- The safety certification (EN 60601) and 1xMOPP/2xMOPP rating is for a system input voltage within 250 VAC, 50/60 Hz.
- These converters are specified for operation without external components. However, to meet specific EMC standards, some external components may be required. Typical connections are shown below.
- All models operate to 85°C ambient without derating. They are not specified for operation over 85°C. Contact the factory for more information.
- Operation at no-load will not damage these units. However, they may not meet all specifications.
- It is recommended that a fuse be used on the input of a power supply for protection. See the table above for the correct rating.


Typical Connection, Single Output Models

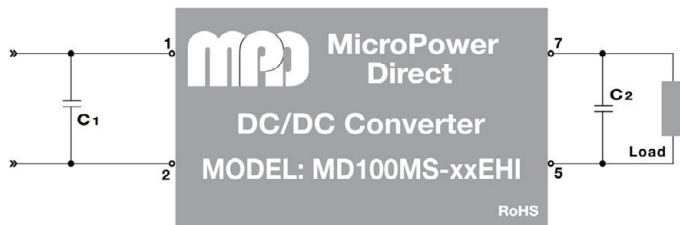

These converters are specified for operation without external components. However, in some applications the addition of input/output capacitors will enhance stability and reduce output ripple. For applications that require this, the diagrams above illustrates a typical connection of the MD100Mx-xxEHI series. Suggested component values are given in the table at right.


Capacitors C2 and C3 are not required to meet specifications, but may be used if a lower level of output ripple is required.

Typical Connection, Dual Output Models

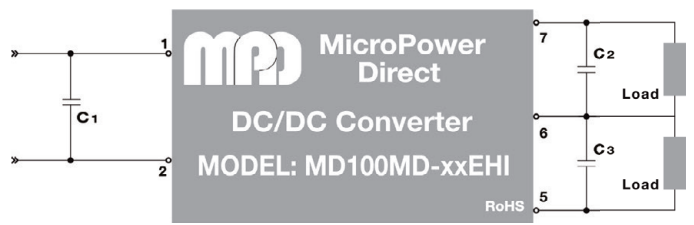

V _{IN}	C ₁	V _{OUT}	C ₂	C ₃
5 VDC	10 μF/50V	3.3 VDC	10 μF	---
12 VDC	4.7 μF/50V	5.0 VDC	10 μF	---
24 VDC	2.2 μF/50V	12 VDC	2.2 μF	---
		15 VDC	1.0 μF	---
		±5.0 VDC	4.7 μF	4.7 μF
		±9.0 VDC	2.2 μF	2.2 μF
		±12 VDC	1.0 μF	1.0 μF
		±15 VDC	1.0 μF	1.0 μF

Typical Connection, EMI Input Filter

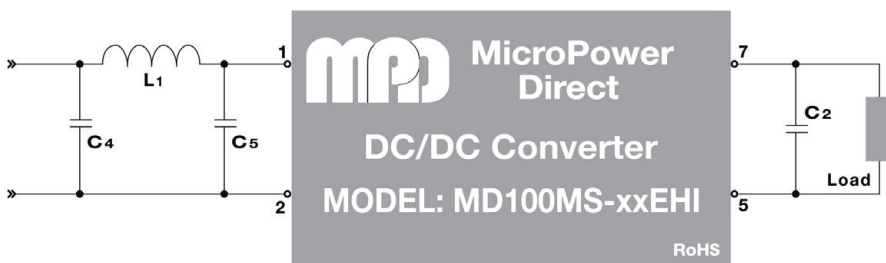


For applications that require meeting EMC standards, the diagram at left illustrates a typical connection of the MD100Mx-xxEHI series. Suggested component values are given in the table at below.


The value for capacitor C2 is given above.

V _{IN}	C ₄	L ₁	C ₅
5 VDC	4.7 μF/50V	6.8 μH	4.7 μF/50V
12 VDC	4.7 μF/50V	6.8 μH	4.7 μF/50V
24 VDC	4.7 μF/50V	6.8 μH	4.7 μF/50V


Typical Efficiency vs Output, Nom Input

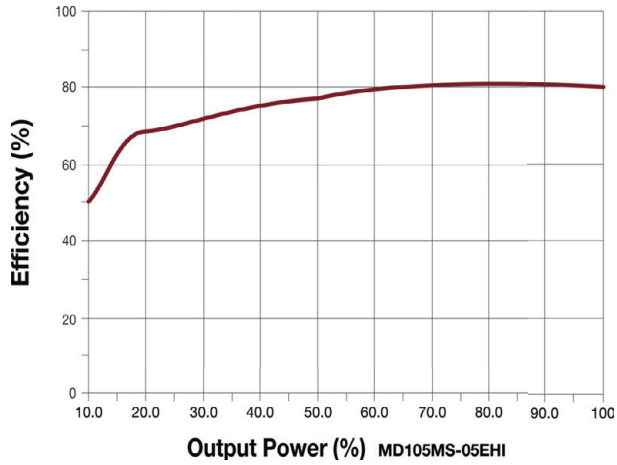


Typical Efficiency vs Output, Nom Input

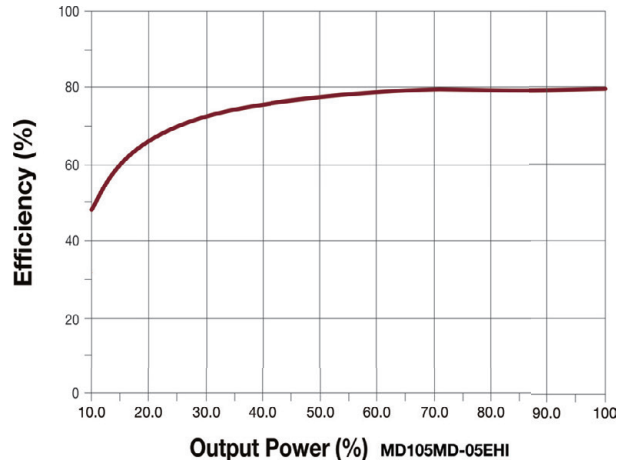

Typical Efficiency vs Input, Full Load

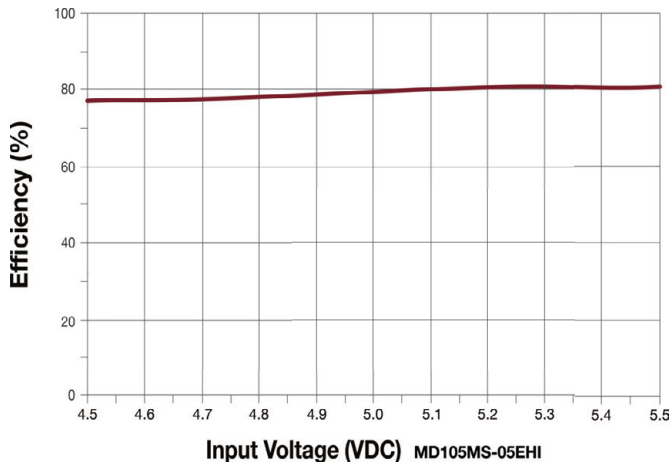


Typical Efficiency vs Input, Full Load

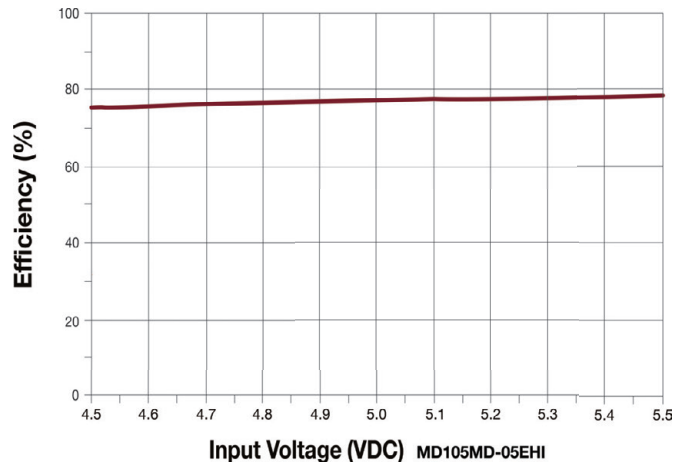

Mechanical Dimensions

Pin Connections

Pin	Single	Dual
1	+VIN	+VIN
2	-VIN	-VIN
5	-VOUT	-VOUT
6	No Pin	Common
7	+VOUT	+VOUT

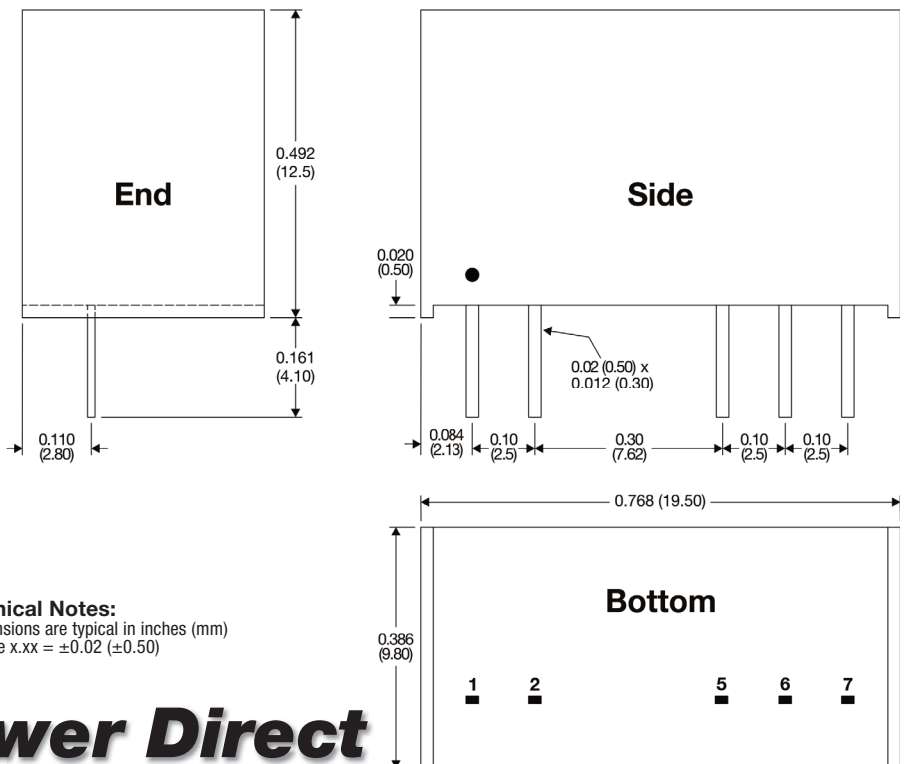

Mechanical Notes:
 • All dimensions are typical in inches (mm)
 • Tolerance x.xx = ±0.02 (±0.50)



MicroPower Direct
 We Power Your Success - For Less!