

# AD1024F Series

## Very Low Cost, 20W DIN Rail Mount Single Output AC/DC Power Supplies



**Models available to  
360W! Call today  
for details**

### Key Features:

- 20W Output Power
- DIN Rail Mountable
- Universal AC Input
- UL 508 Compliant
- EN60950 Compliant
- 5, 12, 24 & 48 VDC Outputs
- Cond./Rad. EMI Class B
- >170 kH MTBF
- **LOW COST!**



### MicroPower Direct

292 Page Street  
Suite D  
Stoughton, MA 02072  
USA

T: (781) 344-8226  
F: (781) 344-8481  
E: sales@micropowerdirect.com  
W: www.micropowerdirect.com



### Electrical Specifications

Specifications typical @ +25°C, nominal input voltage & rated output current, unless otherwise noted. Specifications subject to change without notice.

#### Input

Parameter	Conditions	Min.	Typ.	Max.	Units
Input Voltage Range	Universal	100		240	VAC
		127		370	VDC
Input Frequency		47		63	Hz
Inrush Current, Cold Start	110 VAC		22		A
	220 VAC		44		A
Leakage Current	264 VAC			1.8	mA

#### Output

Parameter	Conditions	Min.	Typ.	Max.	Units
Output Voltage Accuracy			±0.5		%
Line Regulation	Vin = Min to Max		±1.0		%
Load Regulation (Note 1)	Iout = 20% to 100%		±1.0		%
Hold Time	110 VAC, Full Load		10		mSec
	220 VAC, Full Load		20		
Ripple & Noise (20 MHz) (Note 2)	See Model Selection Guide				
Output Power Protection	Power Limit	130		160	%
Transient Recovery Time (Note 3)	50% Load Change		2		mS
Transient Response Deviation			5		%
Temperature Coefficient			±0.02	±0.03	%/°C
Output Short Circuit	Continuous With Autorecovery				

#### General

Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation Voltage	Input - Output	3,000			VAC
	Input - FG (Frame Ground)	2,000			
	Output - FG (Frame Ground)	500			
Isolation Resistance (Note 4)	500 VDC	100			MΩ
Switching Frequency	Fixed		66		kHz

#### Environmental

Parameter	Conditions	Min.	Typ.	Max.	Units
Operating Temperature Range	Ambient	-20	+25	+50	°C
Storage Temperature Range		-20		+85	°C
Cooling	Free Air Convection				
Humidity	RH, Non-condensing			95	%

#### Physical

Case Size	3.54 x 2.54 x 1.77 Inches (90.0 x 64.5 x 44.0 mm)				
Case Material	Plastic				
Connection	Screw Terminal				

#### Reliability Specifications

Parameter	Conditions	Min.	Typ.	Max.	Units
MTBF	MIL HDBK 217F, 25°C, Gnd Benign	170			kHours
Safety Standards	UL 1950, EN 60950, IEC 60950				
EMI Compliance	Compliance to EN55011, EN55022 (CISPR22) Class B				
EMS Immunity Compliance	EN61000-4-2,3,4,5,6,8,11 Level 3				


## Model Selection Guide

Model Number	Rated Power (W)	Input			Output			Output Ripple & Noise (mV P-P)	Overvoltage Protection (VDC)	Efficiency (% Typ)	Fuse Rating Slow-Blow (A)
		Voltage (VAC)	Current (A)		Voltage (VDC)	Current (A) Max	Current (A) Range				
			Universal Range	115 VAC							
AD1020-05F	20	100 - 240	1.0	0.5	5	4.0	0 ~ 4.0	50	7.0	78	2.0
AD1024-12F	24	100 - 240	1.0	0.5	12	2.0	0 ~ 2.0	100	20.0	80	2.0
AD1024-24F	24	100 - 240	1.0	0.5	24	1.0	0 ~ 1.0	150	40.0	83	2.0
AD1024-48F	24	100 - 240	1.0	0.5	48	0.5	0 ~ 0.5	250	60.0	83	2.0


### Notes:

- Load regulation is specified for a load change of 20% to 100%.
- Ripple & noise is measured using equipment with 20 Mhz of bandwidth with the unit under test operating at rated load and a 110 VAC input. Connection to the unit is made with a 0.1  $\mu$ F / 630V metalized capacitor & a 47  $\mu$ F electrolytic capacitor connected in parallel.
- Transient recovery is measured to within a 1% error band for a load step change of 50% to 100%.
- Isolation resistance is given for Input/Output and Input/FG. For Output/FG., it is 50 M $\Omega$ .
- Overload protection is power limiting. The unit recovers automatically when the fault is removed.
- Over voltage protection is a shut down type. The unit recovers automatically when the fault is removed.
- To mount the unit to the DIN rail, tilt the unit rearwards from the top, fitting the mount over the top of the rail. Press back on the bottom front of the unit until it locks in place on the rail. To remove the unit from the rail, pull the removal clip at the bottom rear of the unit downward with a screw driver. With the clip down, lift up on the unit from the bottom front until it clears the rail. Before installation or removal all wiring should be disconnected and the main power to the system shut off.
- When wiring the supply, all lines should be as thick and short as possible. AWG 14 wire is recommended for the **AD1024F** series.
- The units should be mounted so they are vertically orientated. Air flow (if it is provided) would optimally flow from the bottom to the top of the unit.
- It is recommended that a fuse be used on the input of a power supply for protection. For the **AD1024F** series, a 250 VAC 2.0A is recommended.

### Derating Curve

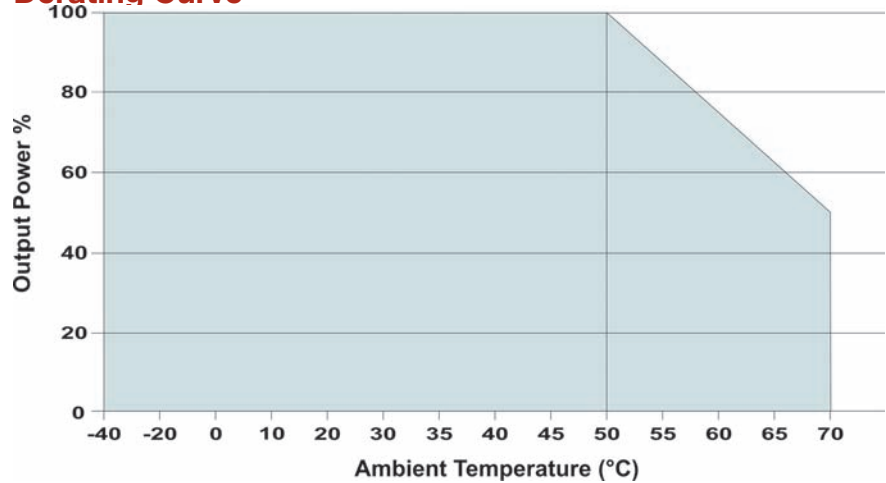

### Mechanical Dimensions

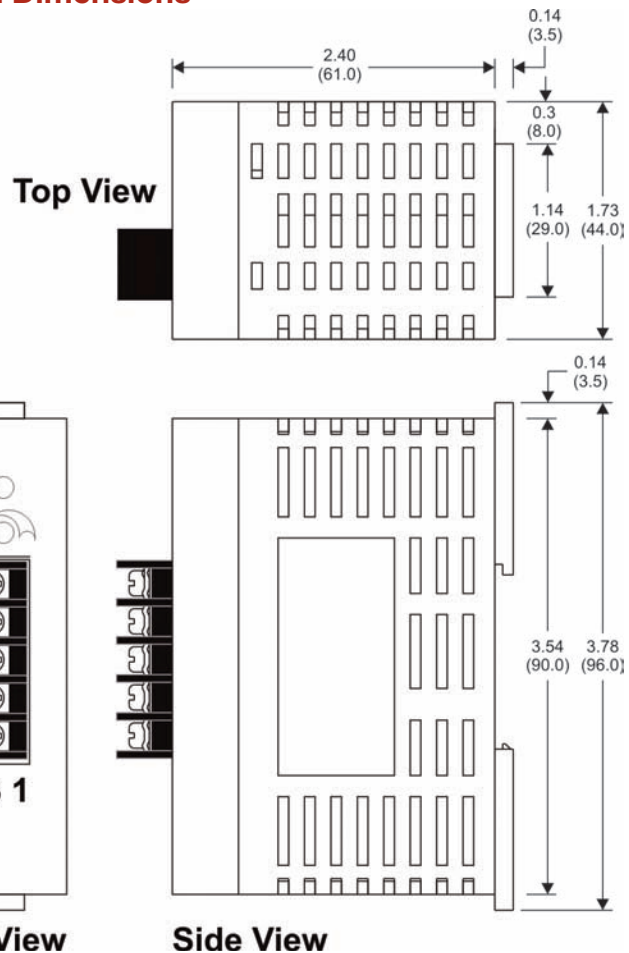

### Connections TB 1

Pin	Function
1	DC Output (+V)
2	DC Output (-V)
3	Frame Ground (FG)
4	AC/Neutral
5	AC/Live

### Notes:

- All dimensions are typical in inches (mm)
- Tolerance x.xx =  $\pm 0.01$  ( $\pm 0.25$ )



**MicroPower Direct**  
www.micropowerdirect.com