MPE-35C

35W, High Isolation AC/DC Power Supplies

Key Features:

- 35W Output Power
- 85-264 VAC Input
- 4,000 VAC Isolation
- Efficiency to 88%
- -30°C to +70°C Temp
- Meets EN 55032 B
- >300 kHour MBTF
- OVC Class III
- UL62368 Approval

Electrical Specifications

Specifications typical @ +25°C, nominal input voltage & rated output current, unless otherwise noted. Specifications subject to change without notice.

Input

Parameter	Conditions		Min.	Typ.	Max.	Units
Input Voltage Range		AC Input	85		264	VAC
		DC Input	120		370	VDC
Input Frequency			47		63	Hz
Input Current		115 VAC			0.8	A
		230 VAC			0.6	
Inrush Current (Cold Start)		115 VAC		30		A
		230 VAC		50		
Leakage Current		240 VAC			0.75	mA

Output

Parameter	Conditions		Min.	Typ.	Max.	Units
Output Voltage Accuracy	Full Load	5V Output		±2		%
		Other Outputs		±1		
Line Regulation	Full Load			±0.5		%
Load Regulation	0-100% Load	5V Output		±1		%
		Other Outputs		±0.5		
Ripple & Noise (20 MHz)		5V Output			80	mV P - P
		12, 15V Outputs			120	
		24V Output			150	
Hold-Up Time		115 VAC	8			ms
		230 VAC	30			
Standby Power Consumption		230VAC			0.3	W
Operating Temp Derating	-30 to -25°C	85 - 100VAC	5			%/°C
	+50 to +70°C		2			
Input Voltage Derating	85 - 100VAC		1.33			%/VAC
Temperature Coefficient				±0.03		%/°C
Over Load Protection			120		200	%Io
Short Circuit Protection	Recovery time <5s after short circuit removed		Hiccup Mode, Continuous, Self-Recovery			
Switching Frequency				65		kHz

General

Parameter	Conditions		Min.	Typ.	Max.	Units
Isolation Voltage		Input - Ground	2,000			VAC
		Input - Output	4,000			
		Output - Ground	1,250			
Isolation Resistance		See Note 6	100			MΩ

EMI Characteristics

Parameter	Standard	Criteria	Level
Radiated Emissions, See Page 3	CISPR32/EN 55032		Class B
Conducted Emissions	CISPR32/EN 55032		Class B

Environmental

Parameter	Conditions	Min.	Typ.	Max.	Units
Operating Temperature Range	Ambient	-30		70	°C
Storage Temperature Range		-40		85	°C
Cooling	Free Air Convection				
Operating Humidity	Non-condensing	20		90	%RH
Storage Humidity				95	

Physical

Case Size	3.90 x 3.23 x 1.18 in (See Mechanical Drawing on Page 6)
Case Material	Metal (AL1100, SGCC)
Weight	5.47 oz (155g) (See Mechanical Drawing on Page 6)

Reliability Specifications

Parameter	Conditions	Min.	Typ.	Max.	Units
MTBF	MIL HDBK 217F, 25°C, Gnd Benign	0.3			MHours
Safety Standards	UL/cUL 62368-1 Recognition (UL Certificate)				
Safety Class	Class I				

MicroPower Direct
46 Eastman Street
Unit 1
Easton, MA 02375
USA

T: (781) 344-8226
F: (781) 344-8481
E: sales@micropowerdirect.com
W: www.micropowerdirect.com

MICROPOWER DIRECT

www.micropowerdirect.com

Model Selection Guide

Model Number	Input Current (mA)		Output Voltage (VDC)	Output Voltage Adjustable Range (VDC)	Output Current (A, Max)	Output Power (W)	Over Voltage Protection (VDC) See Note 5	Output Capacitive Load (μF Max)	Efficiency (%, Typ)
	115 VAC	230 VAC							
MPE-35C-05	800	600	5	4.5 - 5.5	7	35	6.75	8000	86
MPE-35C-12	800	600	12	10.2 - 13.8	3	36	16.2	1500	87
MPE-35C-15	800	600	15	13.5 - 18	2.4	36	21.75	1000	88
MPE-35C-24	800	600	24	21.6 - 28.8	1.5	36	33.6	750	88

Notes:

1. The "tip and barrel method" is used for ripple and noise test, output parallel 47uF electrolytic capacitor and 0.1uF ceramic capacitor.
2. Output short circuit protection is provided by a "hiccup mode" circuit. The unit recovers automatically when the fault condition is removed.
3. Input-output isolation is tested for 60 seconds with a leakage current of <5 mA.
4. A temperature derating of 5°C/1000m is required for operating altitude greater than 2000m.
5. The output voltage can be adjusted by the ADJ knob. Turn clockwise to increase and counterclockwise to decrease.
6. Isolation resistance is given for input - output, input - ground and output - ground. It is tested at 500VDC.

For conformal coating option, add the suffix "**-CC**" to the model number (e.g. **MPE-35C-05-CC**).

Temperature Derating

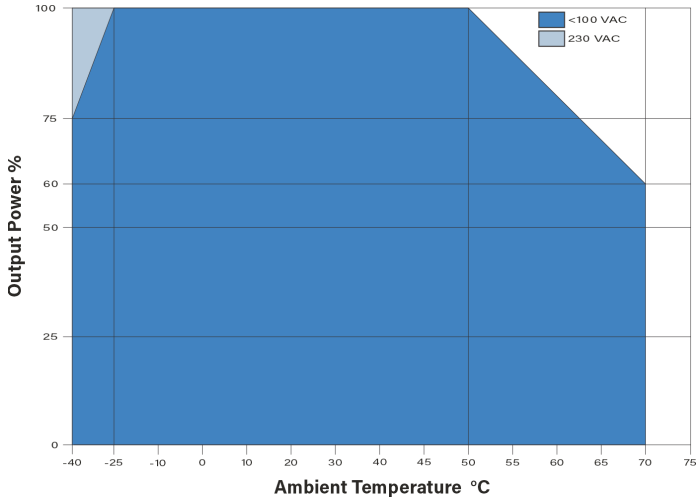

Input Voltage Derating

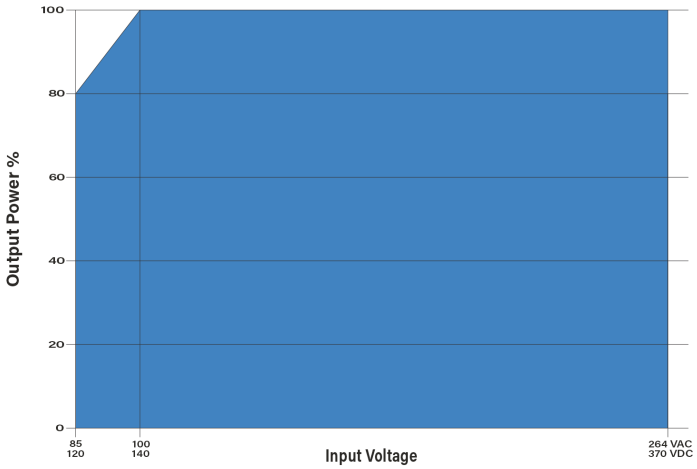

Efficiency vs Input Voltage: 5V

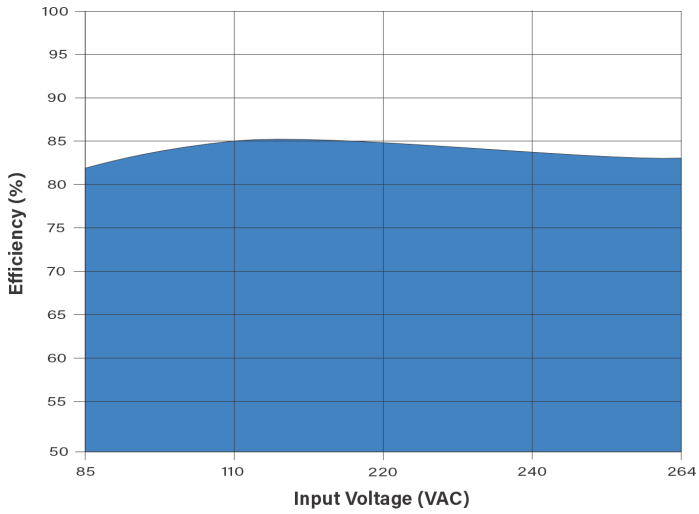

Efficiency vs Output Load: 5V (230VAC)

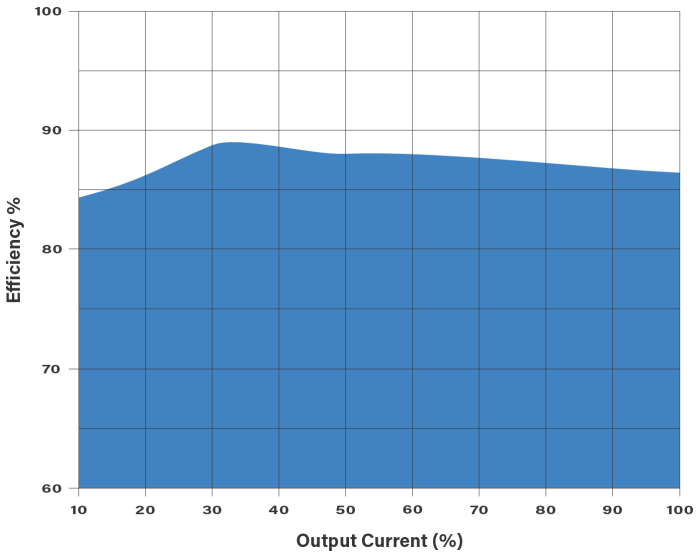

Efficiency vs Input Voltage: 12V

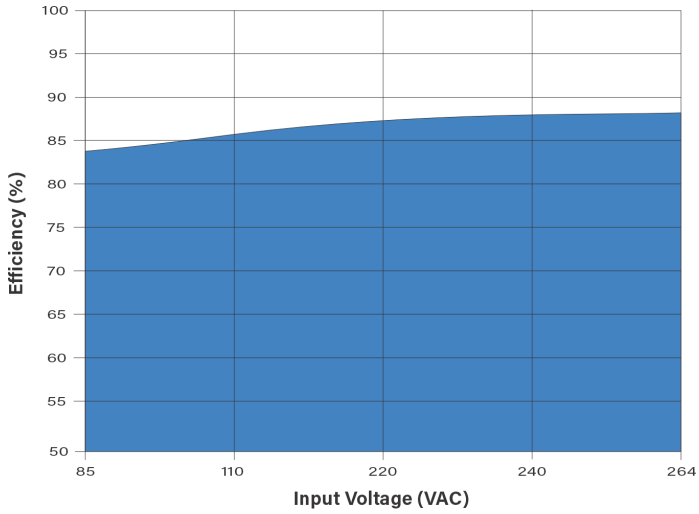

Efficiency vs Output Load: 12V (230VAC)

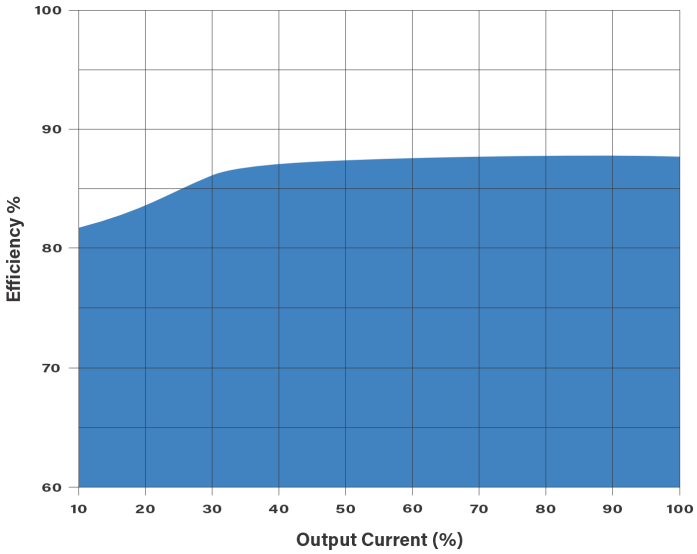

Efficiency vs Input Voltage: 24V

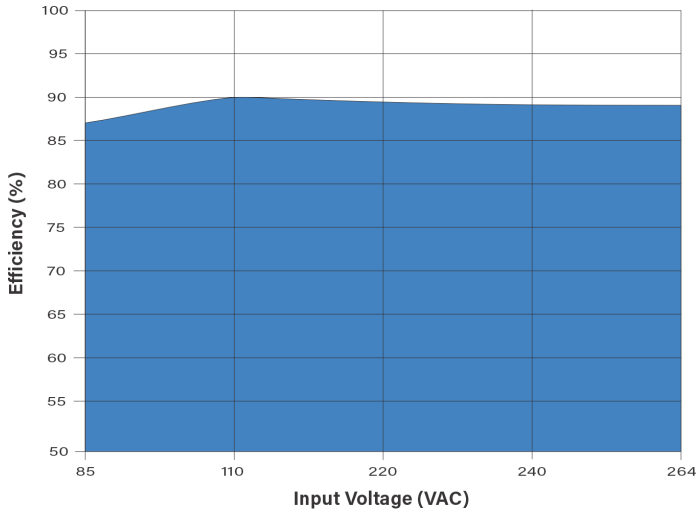

Efficiency vs Output Load: 24V (230VAC)

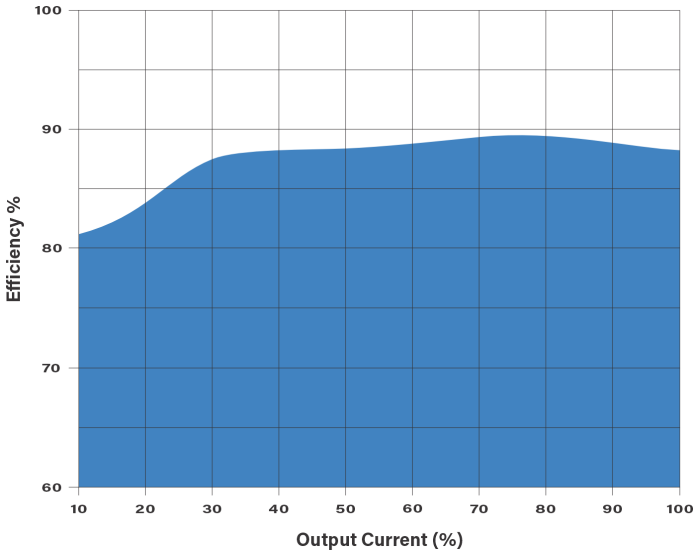

EMI Characteristics

Parameter	Standard	Criteria	Level
Radiated Emissions (RE)	CISPR32/EN55032		B
Conducted Emissions (CE)	CISPR32/EN55032		B
Harmonic Current	IEC/EN61000-3-2		A
ESD	IEC/EN61000-4-2	A	Contact ±6kV/Air ±8KV
RS	IEC/EN61000-4-3	A	10V/m
EFT	IEC/EN61000-4-4	A	±2KV
Surge	IEC/EN61000-4-5	A	line to line ±2KV/line to ground ±4KV
CS	IEC/EN61000-4-6	A	10 Vr.m.s
MS	IEC/EN61000-4-8	A	30A/m
Voltage Dips, Short, Interruption	IEC/EN61000-4-11	B	0%, 70%

Mechanical Diagrams

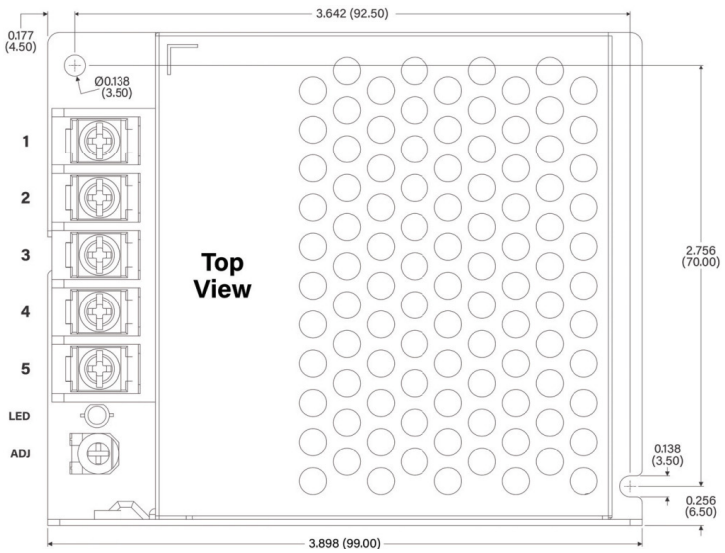

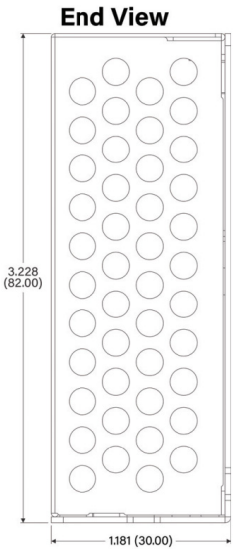

THIRD ANGLE PROJECTION

Pin-Out	
Pin	**Function**
1	AC(L)
2	AC(N)
3	GRND
4	-Vo
5	+Vo

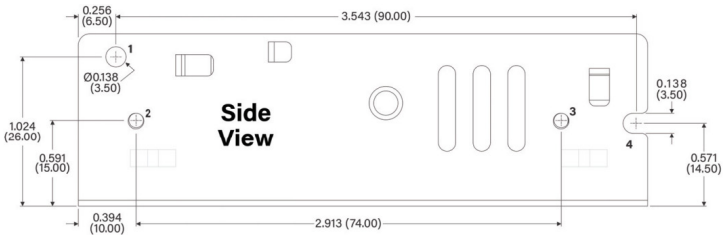

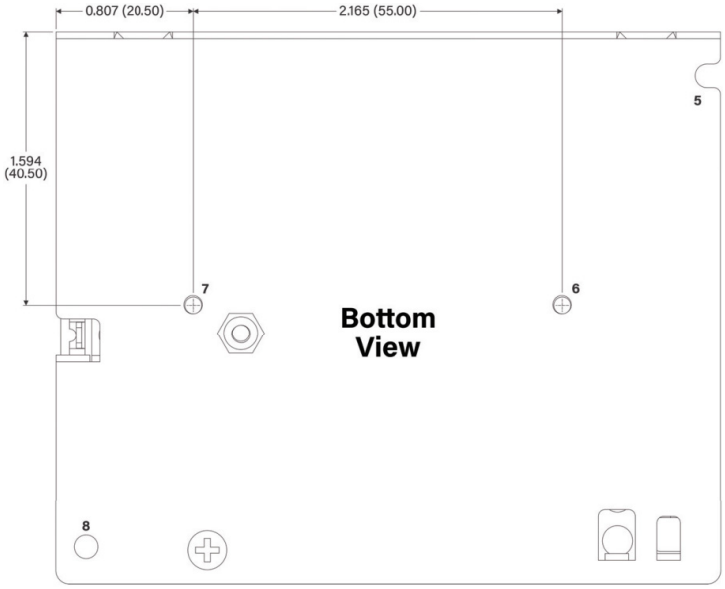

Position	Screw Spec	Length of Locking Screw L (max)	Torque (max)
2 - 3	M3	5mm	0.4N · m
6 - 7	M3	3mm	0.4N · m

2 - 8 any position must be connected to ground



Notes:

- All dimensions are typical in inches (mm)
- ADJ: Output voltage adjustable
- Wire range: 22-12AWG
- Connector tightening torque: M3.5, Max 0.8N · m
- General tolerances: ±0.039 (±1.00)

Weight:

- 5.47 oz (155g)