MDR-240SNY

Single Output, Very Compact 240W DIN Rail AC/DC Power Supplies

Key Features:

- 240W Output Power
- 3,000 VAC I/O Isolation
- Universal AC Input
- Takes AC or DC Input
- Ultra Slim Case
- UL Approved
- -20°C to 70°C Operation
- Meets EN 55032 B
- >200 kHour MTBF
- High Efficiency

Electrical Specifications

Specifications typical @ +25°C, nominal input voltage & rated output current, unless otherwise noted. Specifications subject to change without notice.

Input

Parameter	Conditions		Min.	Typ.	Max.	Units
Input Voltage Range			90		264	VAC
			127		370	VDC
Input Frequency			47		63	Hz
Input Current	See Model Selection Guide					
Power Factor	Full Load	115 VAC		>0.98		
		230 VAC		>0.95		
Leakage Current		240 VAC			1.0	mA
Inrush Current, Cold Start		115 VAC		20		A Pk
		230 VAC		35		

Output

Parameter	Conditions		Min.	Typ.	Max.	Units
Output Voltage Accuracy				±2.0		%
Line Regulation				±0.5		%
Load Regulation				±1.0		%
Ripple & Noise (20 MHz), See Note 1					150	mVp-p
Hold-Up Time	Full Load	115 VAC/60Hz		12		ms
		230 VAC/50Hz		16		
Temperature Coefficient				±0.03		%/°C
Over Current Protection			105		130	%IOUT
Short Circuit Protection, See Note 2	Continuous (Autorecovery)					

General

Parameter	Conditions		Min.	Typ.	Max.	Units
Isolation Voltage, See Note 3		Input to Output	3,000			VAC
		Input to Field Ground	2,000			
		Output to Field Ground	500			
		Output to DC OK Relay	500			
Isolation Resistance	500VDC	Input to Output	100			MΩ
		Input to Field Ground				
		Output to Field Ground				

EMI **See Page 2**

Environmental

Parameter	Conditions		Min.	Typ.	Max.	Units
Operating Temperature Range		Ambient	-20		+70	°C
Storage Temperature Range			-40		+85	°C
Cooling	Free Air Convection (See Derating Curves on Page 2)					
Humidity, RH, Non-condensing		Working	20		95	%
		Storage	10		95	
Overtemperature Protection	Autorecovery					

Physical

Size	2.48 x 4.92 x 4.47 in. (See Mechanical Drawing on Page 3)
Weight	35.27 oz (1000g) (See Mechanical Drawing on Page 3)
Case Material	Aluminum and Steel

Reliability Specifications

Parameter	Conditions	Min.	Typ.	Max.	Units
MTBF	MIL HDBK 217F, 25°C	200			kHours
Safety Standards	UL508, EN62368-1				

MicroPower Direct
46 Eastman Street
Unit 1
Easton, MA 02375
USA

T: (781) 344-8226
F: (781) 344-8481
E: sales@micropowerdirect.com
W: www.micropowerdirect.com

MICROPOWER DIRECT

Model Selection Guide

Model Number	Input		Output					Over Voltage Protection (VDC) See Note 4	Efficiency % (Typ @ 230 VAC)
	Current (A)		Voltage (VDC)	Adjust Range (VDC)	Current (A)		Power (W)		
	115 VAC	230 VAC			Rated	% Min.			
MDR-240SNY-24	2.5	1.3	24	24.0 - 28.0	10	0	240	29.0 - 33.0	87
MDR-240SNY-48	2.5	1.3	48	48.0 - 55.0	5	0	240	56.0 - 65.0	88

EMI/RFI

Parameter	Standard	Criteria	Level
Radiated Emissions	CISPR 32/EN 55032		B
Conducted Emissions	CISPR 32/EN 55032		B
Harmonic Current	EN 61000-3-2	A	
Voltage Flicker	EN 61000-3-3	A	
ESD	EN 61000-4-2	B	±4KV Contact, ±8KV Air
RS	EN 61000-4-3	A	3V/m
EFT	EN 61000-4-4	B	±1KV
Surge	EN 61000-4-5	A	±1KV line to line
	EN 61000-4-5	A	±2KV line to ground
CS	EN 61000-4-6	A	3V.r.m.s
EMC	EN 61000-4-8	A	1A/m
Voltage Dip, Short, Interruption	EN61000-4-11	B	0%, 70%

Notes:

1. Output ripple is measured at 20 MHz bandwidth using 0.1 μF and 47 μF capacitors connected in parallel as close to the power supply terminals as possible.
2. Output short circuit protection is provided by constant current limiting until hiccup after 3 seconds. The unit recovers automatically when the fault condition is removed.
3. Isolation is tested for 60 seconds with a leakage current of <5 mA.
4. Protection type: shutdown, recycle input to recover.
5. There is an ambient temperature derating of 3.5°C /1000m for operating higher than 2000m (6500ft).

Input Voltage Derating

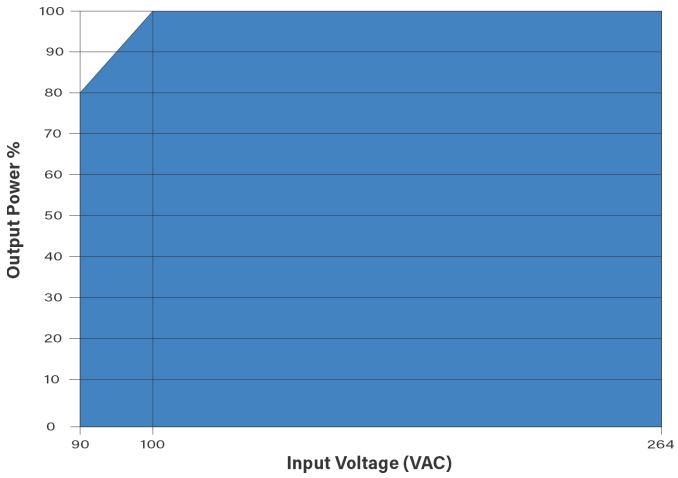

Temperature Derating

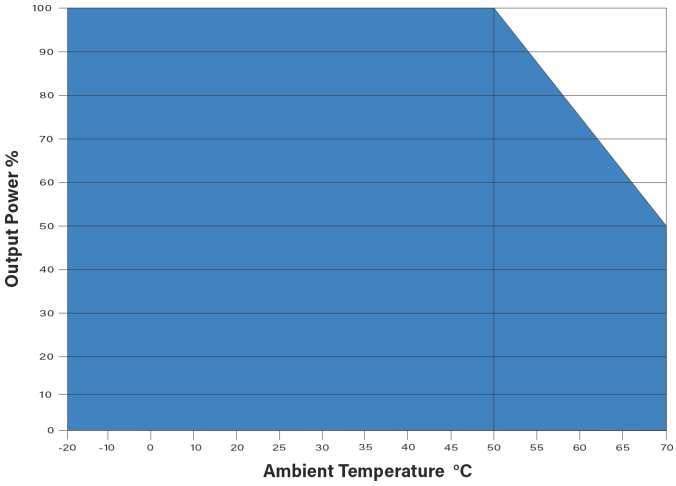

Block Diagram

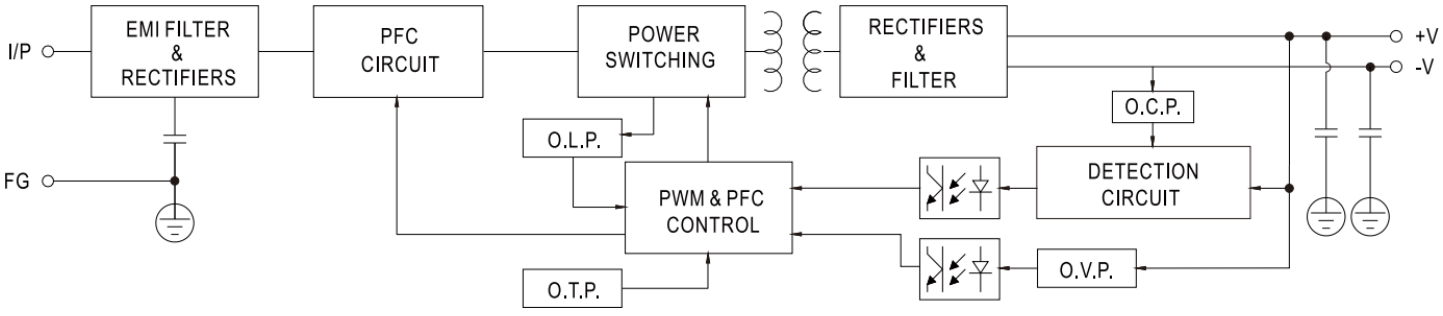

Mechanical Dimensions

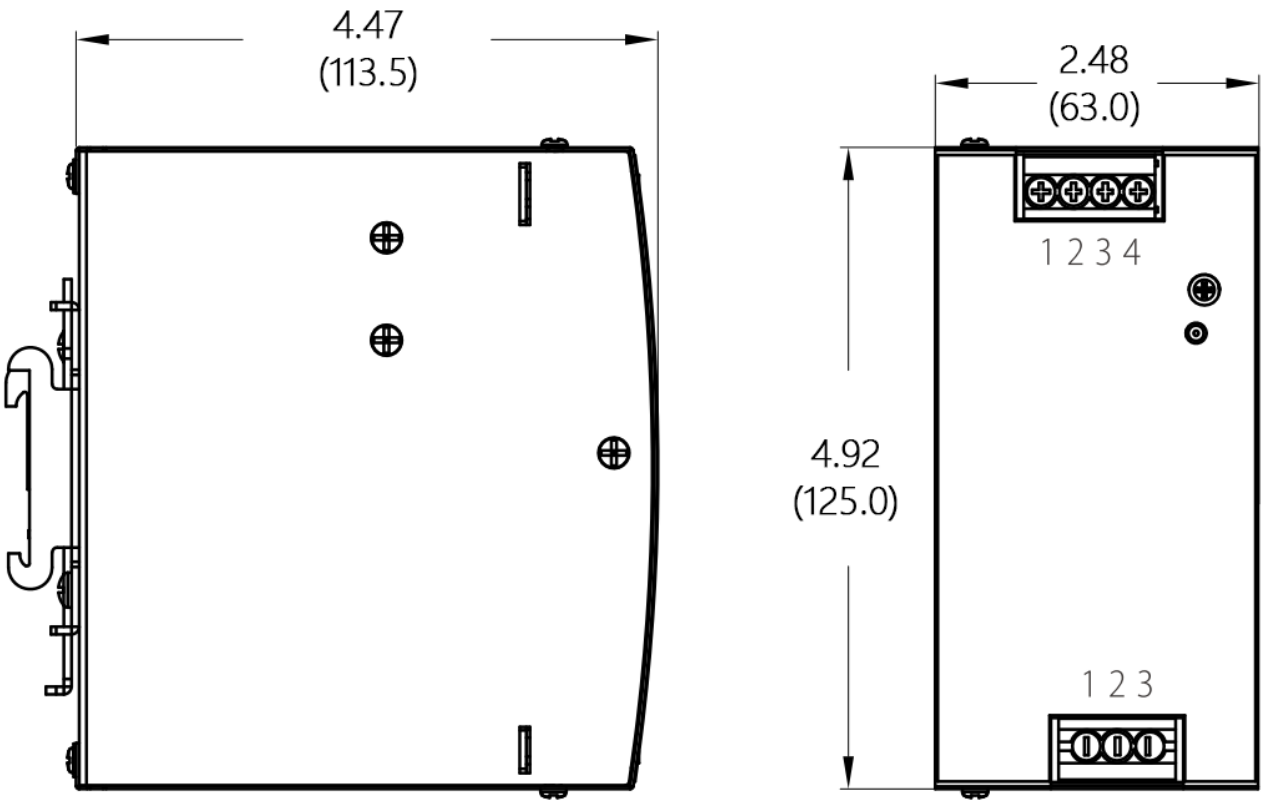

Input	
Pin	**Function**
1	GRND
2	AC (N) or DC-
3	AC (L) or DC+

Output	
Pin	**Function**
1, 2	-VOUT
3, 4	+VOUT

Notes:

- All dimensions are typical in inches (mm)
- Weight: 35.27 Oz (1000g)

Installation Clearance:

- Top: 40mm
- Bottom: 20mm
- Sides: 5mm, increase space to 10-15mm if adjacent device is heat source