



AC/DC Adapters

AC/DC Module Adapter Plates: Chassis Mount and DIN Rail

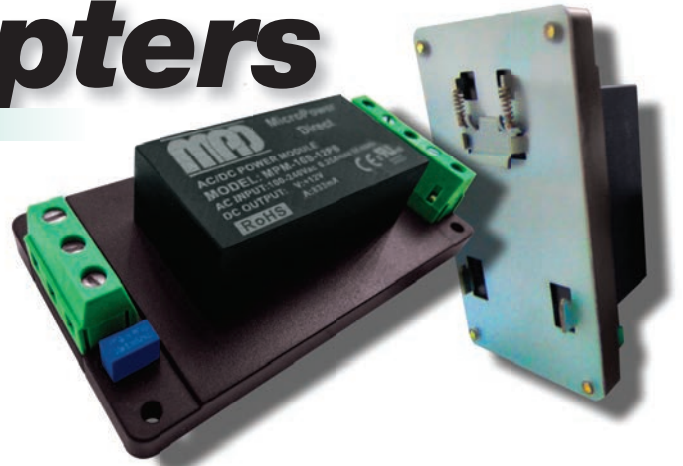

Mechanical Dimensions: A2 Chassis Mount Adapter

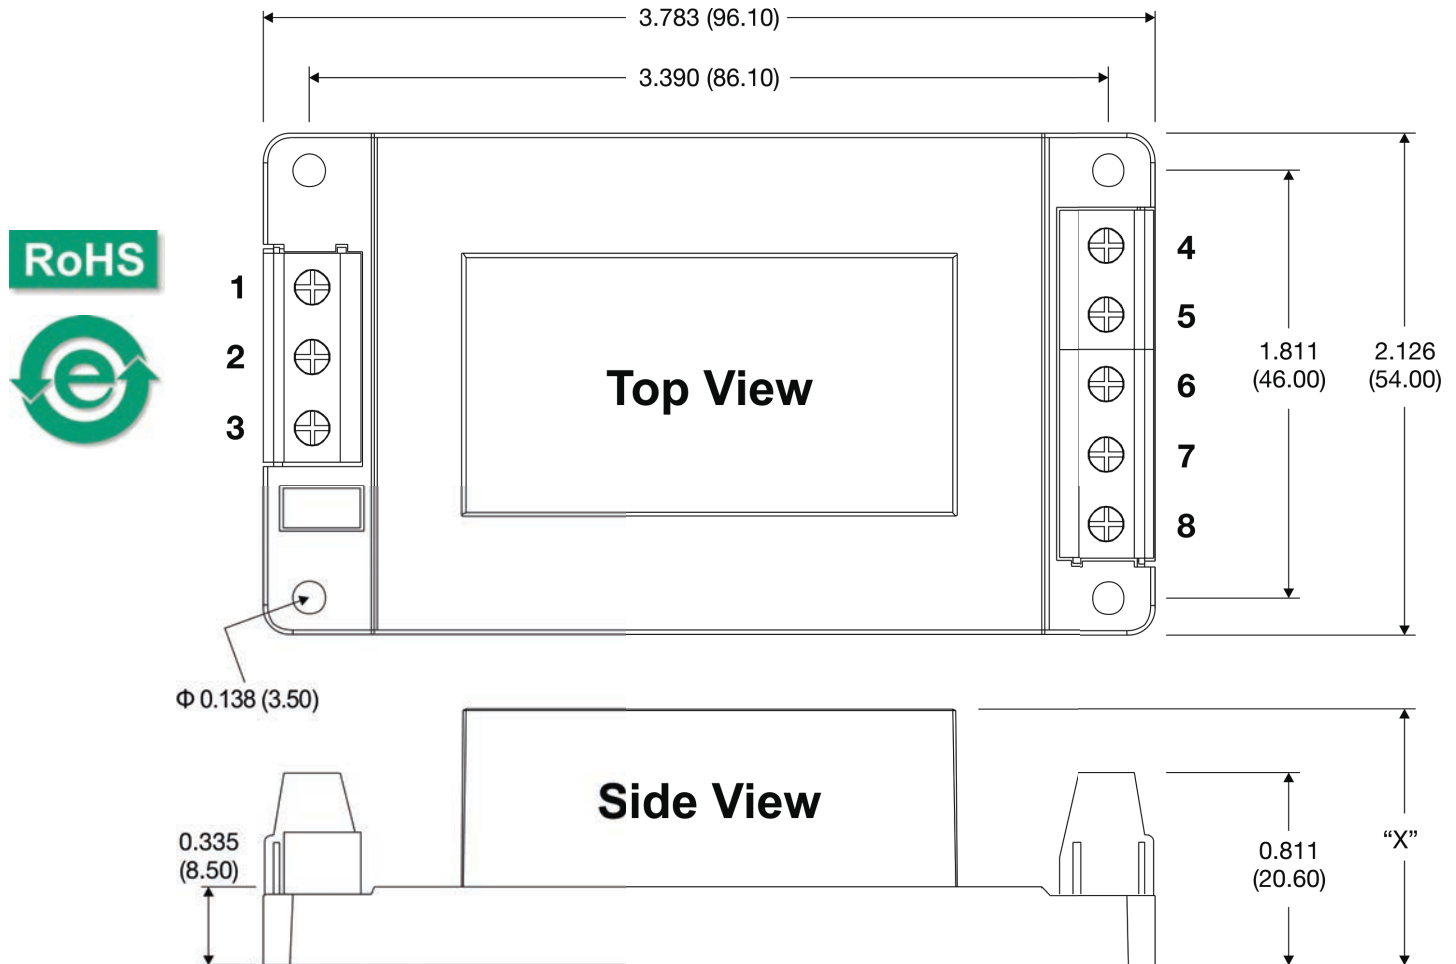

MicroPower Direct

292 Page Street
Suite D
Stoughton, MA 02072
USA

T: (781) 344-8226
F: (781) 344-8481
E: sales@micropowerdirect.com
W: www.micropowerdirect.com




Model Guide: A2 Adapter

Model Number	Power (W)	"X" Dimension =		Weight	
		In.	mm	Oz	g
MPM-05S-xx-A2	5.0	1.450	20.50	3.52	100
MPM-05S-xxPB-A2	5.0	0.935	23.66	3.00	85
MPM-10S/D-xx-A2	10	1.145	29.00	4.23	120
MPM-10S-xxEPB-A2	10	1.085	27.50	3.52	100
MPM-12S-xxEPB-A2	12	1.260	32.00	3.88	110
MPM-15S-xx-A2	15	1.215	31.00	4.58	130
MPM-20S-xx-A2	20	1.260	32.00	6.00	170
MPM-20S-xxEPB-A2	20	1.260	32.00	3.52	100
MPM-25S-xx-A2	25	1.260	32.00	6.00	170

Notes:

- All dimensions are typical in inches (mm)
- Tolerance x.xx = ±0.02 (±0.50)

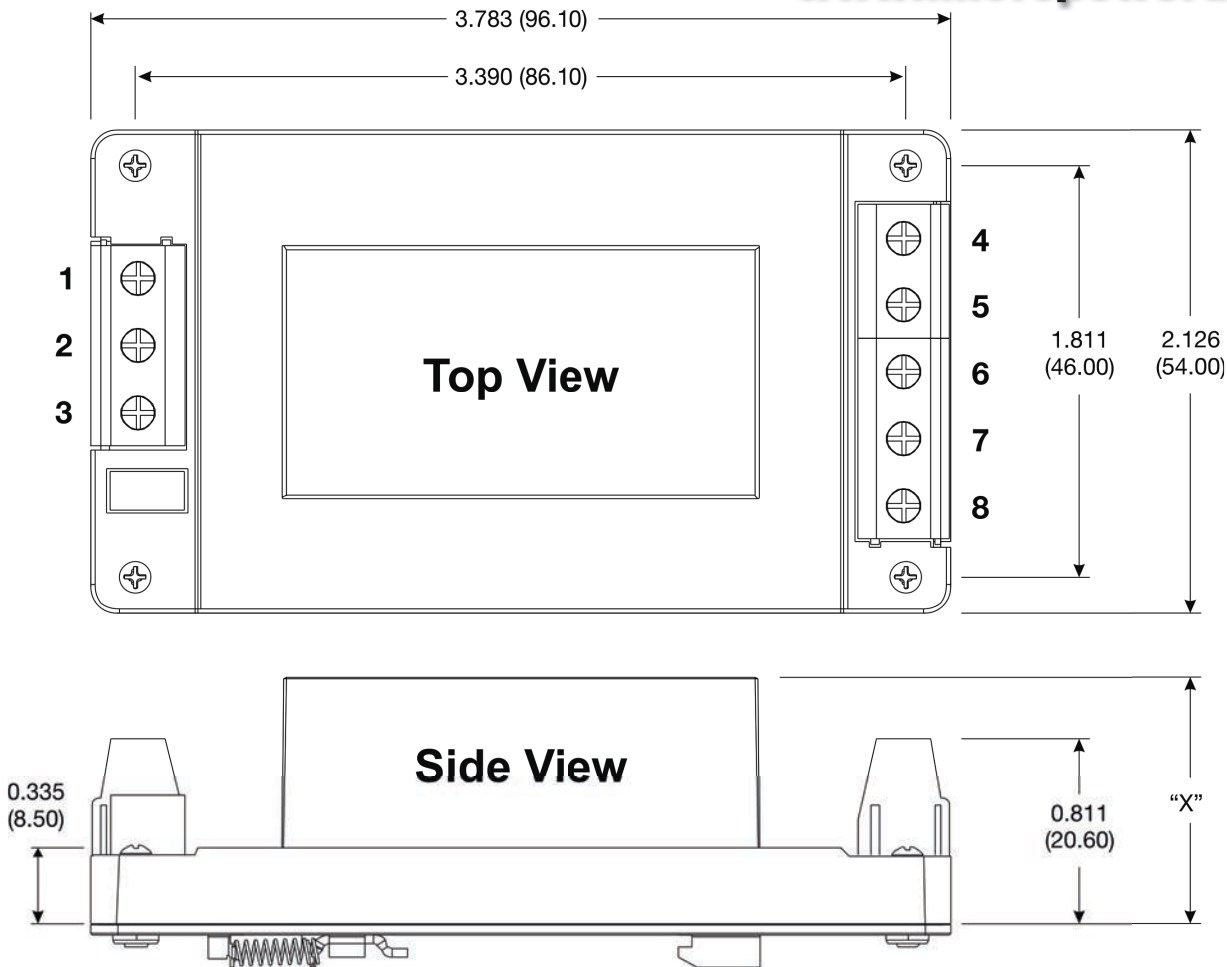

Model Guide: A4 Adapter

Model Number	Power (W)	"X" Dimension =		Weight	
		In.	mm	Oz	g
MPM-05S-xx-A4	5.0	1.450	20.50	4.94	140
MPM-05S-xxPB-A4	5.0	0.935	23.66	4.41	125
MPM-10S/D-xx-A4	10	1.145	29.00	5.64	160
MPM-10S-xxEPB-A4	10	1.085	27.50	4.94	140
MPM-12S-xxEPB-A4	12	1.260	32.00	5.29	150
MPM-15S-xx-A4	15	1.215	31.00	6.00	170
MPM-20S-xx-A4	20	1.260	32.00	7.41	210
MPM-20S-xxEPB-A4	20	1.260	32.00	4.94	140
MPM-25S-xx-A4	25	1.260	32.00	7.41	210

Notes:

- All dimensions are typical in inches (mm)
- Tolerance x.xx = ±0.02 (±0.50)

All Models are shipped as complete assemblies
 For more information, contact the factory:
sales@micropowerdirect.com

Pin Connections

Pin	MPM-05S	MPM-05SPB	MPM-10S	MPM-10D	MPM-10SEPB	MPM-12SEPB	MPM-15S	MPM-20S	MPM-20SEPB	MPM-25S
1	Field-Ground	NC	Field-Ground	Field-Ground	NC	NC	NC	Field-Ground	NC	Field-Ground
2	AC-Neutral	AC-Neutral	AC-Neutral	AC-Neutral	AC-Neutral	AC-Neutral	AC-Neutral	AC-Neutral	AC-Neutral	AC-Neutral
3	AC-Line	AC-Line	AC-Line	AC-Line	AC-Line	AC-Line	AC-Line	AC-Line	AC-Line	AC-Line
4	-Vout	+Vout	-Vout	-Vout	+Vout	+Vout	-Vout	-Vout	+Vout	-Vout
5	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC
6	NC	NC	NC	Common	NC	NC	NC	Trim	NC	Trim
7	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC
8	+Vout	-Vout	+Vout	+Vout	-Vout	-Vout	+Vout	+Vout	-Vout	+Vout



MicroPower Direct
 We Power Your Success - For Less!