

# ME05S Series

## Low Cost, 0.50W Ultra-Miniature SIP DC/DC Converters



### Key Features:

- 0.50W Output Power
- Ultra-Miniature SIP Case
- 48 Standard Models
- Up To 3,000 VDC Isolation
- >1.12 MHour MTBF
- Meets EN 55032 Class B
- -40°C to +85°C Operation



Also Available In  
Ultra-Miniature  
DIP Case

### MicroPower Direct

292 Page Street  
Suite D  
Stoughton, MA 02072  
USA

T: (781) 344-8226  
F: (781) 344-8481  
E: sales@micropowerdirect.com  
W: www.micropowerdirect.com



### Electrical Specifications

Specifications typical @ +25°C, nominal input voltage & rated output current, unless otherwise noted. Specifications subject to change without notice.

Input						
Parameter	Conditions	Min.	Typ.	Max.	Units	
Input Voltage Range	3.3 VDC Input	2.97	3.3	3.63	VDC	
	5 VDC Input	4.50	5.0	5.50		
	12 VDC Input	10.80	12.0	13.20		
	15 VDC Input	13.50	15.0	16.50		
	24 VDC Input	21.60	24.0	26.40		
	48 VDC Input	43.20	48.0	52.80		
Input Reflected Ripple Current			20		mA P - P	
Input Filter	Internal Capacitors					
Output						
Parameter	Conditions	Min.	Typ.	Max.	Units	
Output Voltage Accuracy			±3.0		%	
Line Regulation	For VIN Change of 1%		±1.2		%	
Load Regulation, See Note 1	See Model Selection Guide					
Ripple & Noise (20 MHz)			100		mV P - P	
Temperature Coefficient			±0.02		%/°C	
Output Short Circuit	Momentary (0.5 Sec.)					
General						
Parameter	Conditions	Min.	Typ.	Max.	Units	
Isolation Voltage	60 Seconds	1,000			VDC	
	Units With "I" Suffix	3,000				
Isolation Resistance		1,000			MΩ	
Isolation Capacitance			60		pF	
Switching Frequency	See Note 2		80		kHz	
EMI Characteristics (See Page 3)						
Parameter	Standard	Criteria		Level		
Radiated Emissions	EN 55032			Class B		
Conducted Emissions	See Note 4 EN 55032			Class B		
ESD	EN 61000-4-2	A	±8 kV Air			
			±6 kV Contact			
RS	EN 61000-4-3	A	10V/m			
EFT	See Note 4 EN 61000-4-4	A	±2 kV			
Surge	See Note 4 EN 61000-4-5	A	±0.5 kV			
CS	EN 61000-4-6	A	10 Vrms			
PFMF	EN 61000-4-8	A	1A/m			
Environmental						
Parameter	Conditions	Min.	Typ.	Max.	Units	
Operating Temperature Range	Ambient	-40		+85	°C	
	Case			+100		
Storage Temperature Range		-40		+125	°C	
Cooling	Free Air Convection					
Humidity	RH, Non-condensing			95	%	
Physical						
Case Size & Weight	See Mechanical Diagrams (Page 4)					
Case Material	Non-Conductive Black Plastic (UL-94V0)					
Reliability Specifications						
Parameter	Conditions	Min.	Typ.	Max.	Units	
MTBF	MIL HDBK 217F, 25°C, Gnd Benign	1.121			MHours	
Absolute Maximum Ratings						
Parameter	Conditions	Min.	Typ.	Max.	Units	
Input Voltage Surge (1 Sec)	3.3 VDC Input			5.0	VDC	
	5 VDC Input			7.0		
	12 VDC Input			15.0		
	15 VDC Input			18.0		
	24 VDC Input			28.0		
	48 VDC Input			54.0		
Lead Temperature	1.5 mm From Case For 10 Sec			260	°C	

Caution: Exceeding Absolute Maximum Ratings may damage the module. These are not continuous operating ratings.

[www.micropowerdirect.com](http://www.micropowerdirect.com)

Model Number	Input				Output		Load Regulation (% Typ)	Efficiency (% Typ)	Capacitive Load (µF, Max)	Fuse Rating Slow-Blow (mA)
	Voltage (VDC)		Current (mA)		Voltage (VDC)	Current (mA, Max)				
	Nominal	Range	Full-Load	No-Load						
ME0503S-03(I)	3.3	2.97 - 3.63	205	20	3.3	152.0	±20	76	100	450
ME0503S-05(I)	3.3	2.97 - 3.63	216	25	5.0	100.0	±10	70	100	450
ME0503S-07(I)	3.3	2.97 - 3.63	216	25	7.2	69.0	±10	70	100	450
ME0503S-09(I)	3.3	2.97 - 3.63	216	25	9.0	56.0	±10	70	100	450
ME0503S-12(I)	3.3	2.97 - 3.63	201	25	12.0	42.0	±10	72	100	450
ME0503S-15(I)	3.3	2.97 - 3.63	208	25	15.0	33.0	±10	73	100	450
ME0503S-18(I)	3.3	2.97 - 3.63	208	25	18.0	28.0	±10	73	100	450
ME0503S-24(I)	3.3	2.97 - 3.63	208	25	24.0	21.0	±10	73	100	450
ME0505S-03(I)	5.0	4.5 - 5.5	132	20	3.3	151.5	±20	76	100	250
ME0505S-05(I)	5.0	4.5 - 5.5	121	13	5.0	100.0	±10	83	100	250
ME0505S-07(I)	5.0	4.5 - 5.5	134	15	7.2	69.4	±10	75	100	250
ME0505S-09(I)	5.0	4.5 - 5.5	128	15	9.0	55.5	±10	78	100	250
ME0505S-12(I)	5.0	4.5 - 5.5	127	18	12.0	41.6	±10	79	100	250
ME0505S-15(I)	5.0	4.5 - 5.5	130	22	15.0	33.3	±10	77	100	250
ME0505S-18(I)	5.0	4.5 - 5.5	127	20	18.0	27.7	±10	79	100	250
ME0505S-24(I)	5.0	4.5 - 5.5	134	25	24.0	20.8	±10	75	100	250
ME0512S-03(I)	12	10.8 - 13.2	58	15	3.3	151.5	±20	72	100	125
ME0512S-05(I)	12	10.8 - 13.2	54	10	5.0	100.0	±10	78	100	125
ME0512S-07(I)	12	10.8 - 13.2	57	15	7.2	69.4	±10	73	100	125
ME0512S-09(I)	12	10.8 - 13.2	57	15	9.0	55.5	±10	73	100	125
ME0512S-12(I)	12	10.8 - 13.2	58	20	12.0	41.6	±10	72	100	125
ME0512S-15(I)	12	10.8 - 13.2	61	20	15.0	33.3	±10	69	100	125
ME0512S-18(I)	12	10.8 - 13.2	61	15	18.0	27.7	±10	68	100	125
ME0512S-24(I)	12	10.8 - 13.2	59	15	24.0	20.8	±10	71	100	125
ME0515S-03(I)	15	13.5 - 16.5	44	10	3.3	151.5	±20	75	100	100
ME0515S-05(I)	15	13.5 - 16.5	43	8	5.0	100.0	±10	78	100	100
ME0515S-07(I)	15	13.5 - 16.5	44	12	7.2	69.4	±10	75	100	100
ME0515S-09(I)	15	13.5 - 16.5	44	12	9.0	55.5	±10	75	100	100
ME0515S-12(I)	15	13.5 - 16.5	44	10	12.0	41.6	±10	77	100	100
ME0515S-15(I)	15	13.5 - 16.5	48	15	15.0	33.3	±10	70	100	100
ME0515S-18(I)	15	13.5 - 16.5	51	12	18.0	27.7	±10	66	100	100
ME0515S-24(I)	15	13.5 - 16.5	51	10	24.0	20.8	±10	66	100	100
ME0524S-03(I)	24	21.6 - 26.4	31	8	3.3	151.5	±20	69	100	60
ME0524S-05(I)	24	21.6 - 26.4	29	8	5.0	100.0	±10	73	100	60
ME0524S-07(I)	24	21.6 - 26.4	30	10	7.2	69.4	±10	70	100	60
ME0524S-09(I)	24	21.6 - 26.4	30	10	9.0	55.5	±10	71	100	60
ME0524S-12(I)	24	21.6 - 26.4	30	8	12.0	41.6	±10	71	100	60
ME0524S-15(I)	24	21.6 - 26.4	29	10	15.0	33.3	±10	73	100	60
ME0524S-18(I)	24	21.6 - 26.4	29	10	18.0	27.7	±10	73	100	60
ME0524S-24(I)	24	21.6 - 26.4	29	10	24.0	20.8	±10	72	100	60
ME0548S-03(I)	48	43.2 - 52.8	17	6	3.3	151.5	±20	60	100	40
ME0548S-05(I)	48	43.2 - 52.8	16	6	5.0	100.0	±10	66	100	40
ME0548S-07(I)	48	43.2 - 52.8	17	6	7.2	69.4	±10	60	100	40
ME0548S-09(I)	48	43.2 - 52.8	17	6	9.0	55.5	±10	62	100	40
ME0548S-12(I)	48	43.2 - 52.8	17	6	12.0	41.6	±10	64	100	40
ME0548S-15(I)	48	43.2 - 52.8	17	6	15.0	33.3	±10	62	100	40
ME0548S-18(I)	48	43.2 - 52.8	17	6	18.0	27.7	±10	62	100	40
ME0548S-24(I)	48	43.2 - 52.8	18	10	24.0	20.8	±10	61	100	40

For the 3 kV isolation models, add suffix "I" to model number (i.e. ME0524S-05I)


**Notes:**

1. Output load regulation is specified for a load change of 20% to 100%.
2. Switching frequency is typically 80 kHz, but may vary with differing operating conditions.
3. Operation at no-load will not damage these units. However, they may not meet all specifications.


4. These converters will operate without external components. However, to meet the specified EMI limits, a simple external input filter is required. See the input filter note on page 3 for more information.
5. All units are rated for operation at full output power to +85 °C. Operation over +85 °C without airflow is not

6. It is recommended that a fuse be used on the input of a power supply for protection. See the Model Selection table above for the correct rating.


Output Voltage vs Load: ME0505S-05

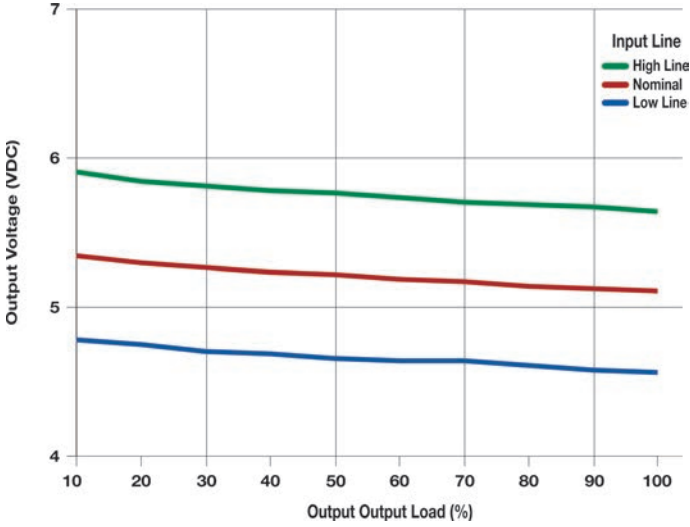


Output Voltage vs Load: ME0512S-05

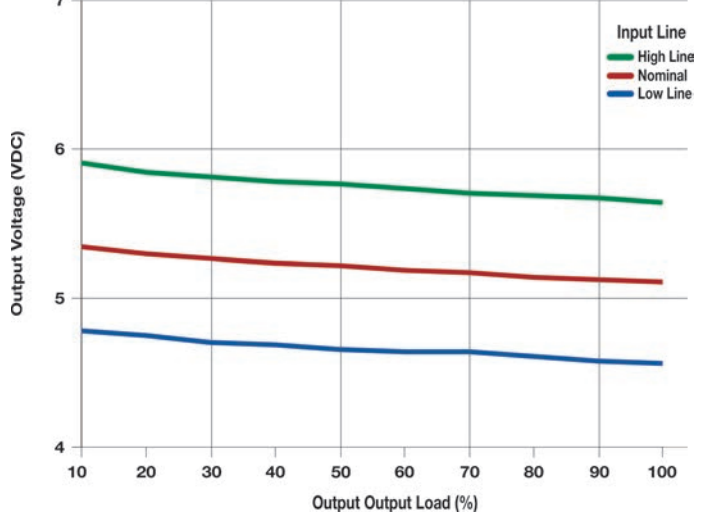


Output Voltage vs Load: ME0524S-05

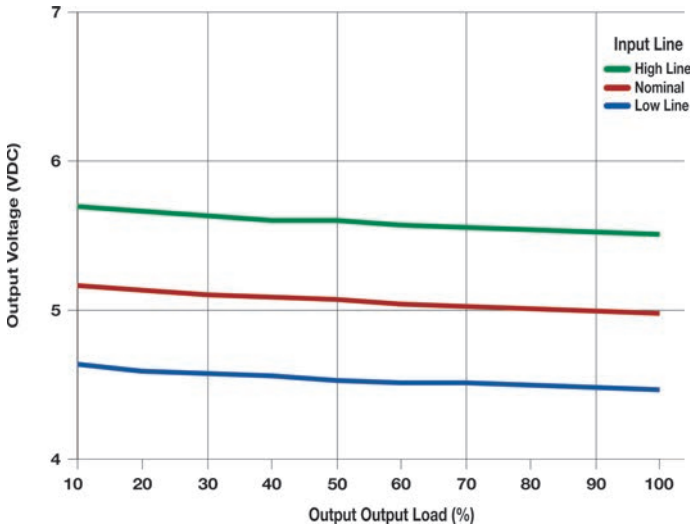

Output Voltage vs Load: ME0548S-05

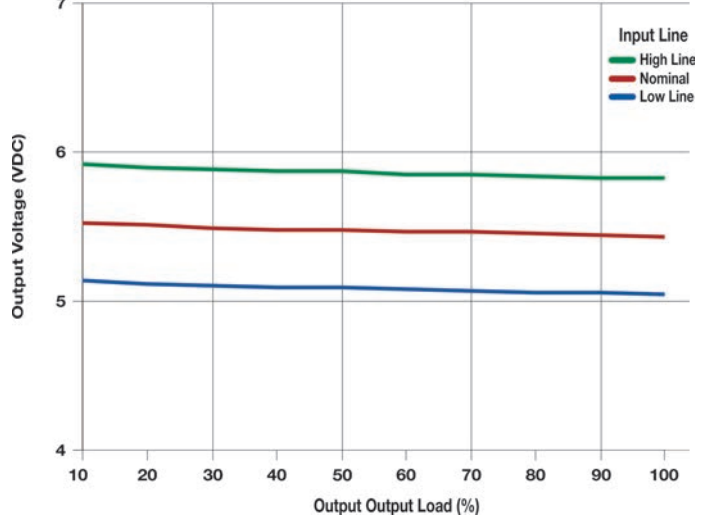

Typical Connection

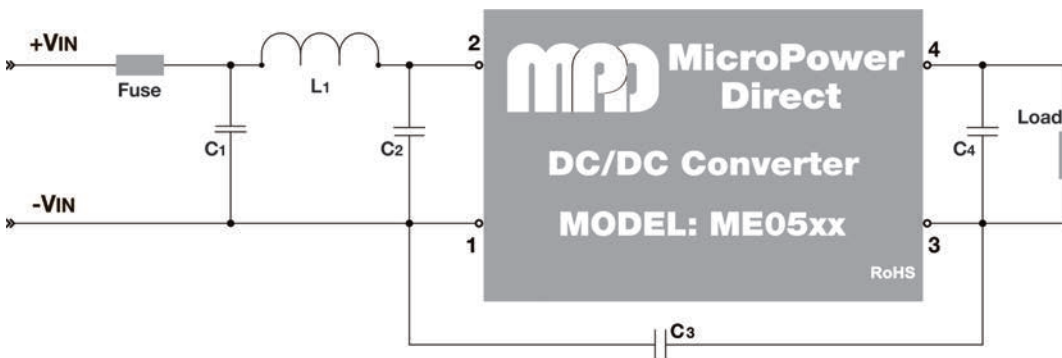


The recommended component values are:

Input V	Fuse	C <sub>1</sub>	L <sub>1</sub>	C <sub>2</sub>	C <sub>3</sub>	C <sub>4</sub>
3.3 V <sub>IN</sub>	450 mA (Slow Blow)	1210, 2.2 μF/100V	18 μH	---	---	4.7 μF to 10 μF
5.0 V <sub>IN</sub>	250 mA (Slow Blow)	1210, 2.2 μF/100V	18 μH	---	---	4.7 μF to 10 μF
12 V <sub>IN</sub>	125 mA (Slow Blow)	1210, 2.2 μF/100V	18 μH	---	---	4.7 μF to 10 μF
15 V <sub>IN</sub>	100 mA (Slow Blow)	1210, 2.2 μF/100V	18 μH	---	---	4.7 μF to 10 μF
24 V <sub>IN</sub>	60 mA (Slow Blow)	1210, 2.2 μF/100V	18 μH	1210, 2.2 μF/100V	1206, 470 pF/2 kV	4.7 μF to 10 μF
48 V <sub>IN</sub>	40 mA (Slow Blow)	10 μF/100V	18 μH	1210, 2.2 μF/100V	1206, 470 pF/2 kV	4.7 μF to 10 μF

For many applications, the ME05S series will operate fine with minimum external components. However, if meeting the requirements of EMI/EMC standards (such as EN 55032) is required, a simple external filter circuit should be sufficient. This is illustrated in the typical connection diagram at left.

Notes:

1. All input/output filtering capacitors should have a low equivalent impedance. Voltage derating of all capacitors should be 60% or greater. All components should be mounted as close to the converter as possible.
2. To meet the requirements of EN 55032, the external components C<sub>1</sub>, L<sub>1</sub>, C<sub>2</sub> and C<sub>3</sub> are required. This is illustrated in the typical connection diagram at left. Values for these components are given in the table below. Contact the factory for more information.
3. To meet the requirements of EN 61000-4-4, a larger external input capacitor is needed. In this case, the value of capacitor C<sub>1</sub> should be changed to 470 μF/100V. Contact the factory for more info.
4. To meet the requirements of EN 61000-4-5, a larger external input capacitor is needed. In this case, the value of capacitor C<sub>1</sub> should be changed to 470 μF/100V. Contact the factory for more info.
5. For noise sensitive applications, it is recommended that the external capacitor C<sub>4</sub> be placed from the +V<sub>OUT</sub> pin to the -V<sub>OUT</sub> pin. Recommended values are given in the table. Care must be taken in choosing capacitors not to exceed the capacitive load specification for the unit.

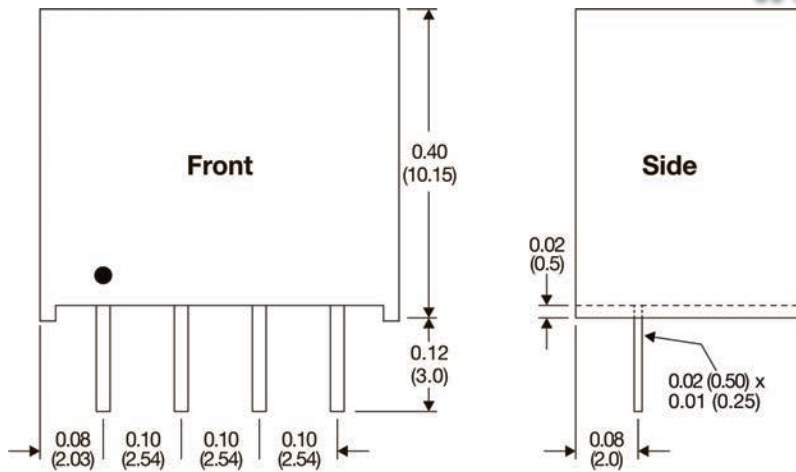


Pin Connections

Pin	Description
1	-VIN
2	+VIN
3	-VOUT
4	+VOUT

Notes:

- All dimensions are typical in inches (mm)
- Tolerance x.xx = ±0.02 (±0.50)
- Pin 1 is marked by a "dot" or indentation on the front of the unit
- Weight: 0.063 Oz (1.9g)

Mechanical Dimensions, All Other Models

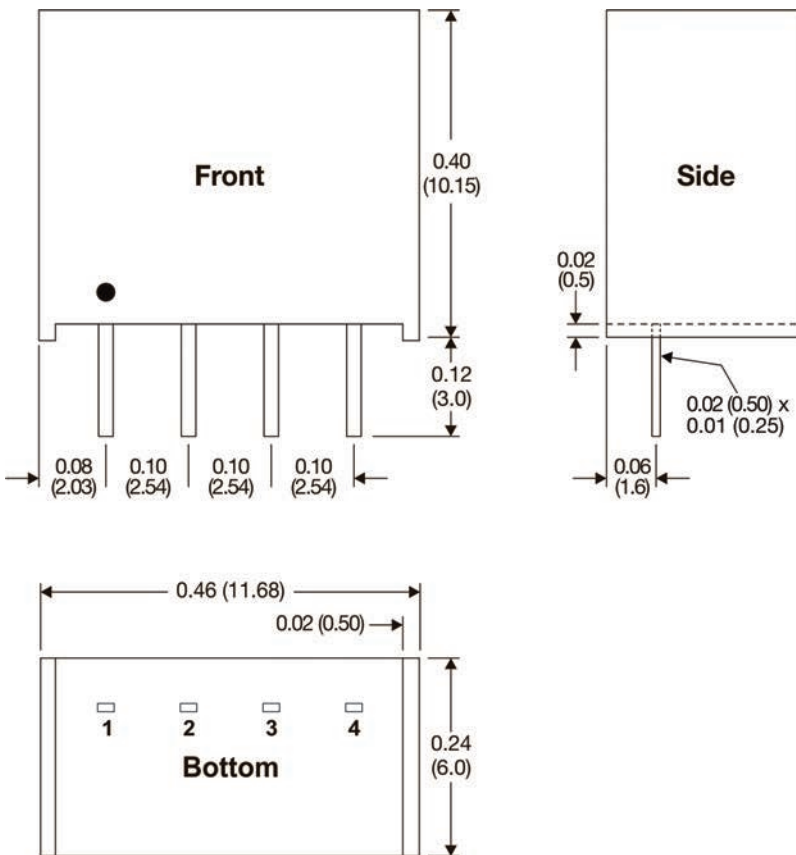

Pin Connections

Pin	Description
1	-VIN
2	+VIN
3	-VOUT
4	+VOUT

Notes:

- All dimensions are typical in inches (mm)
- Tolerance x.xx = ±0.02 (±0.50)
- Pin 1 is marked by a "dot" or indentation on the front of the unit
- Weight: 0.05 Oz (1.5g)