

ME100S Series

Low Cost, 1W Ultra-Miniature SIP DC/DC Converters



Key Features:

- 1W Output Power
- Ultra-Miniature SIP Case
- 35 Standard Models
- 1,000 VDC Isolation
- >1.1 MHour MTBF
- -40°C to +85°C Operation

Electrical Specifications

Specifications typical @ +25°C, nominal input voltage & rated output current, unless otherwise noted. Specifications subject to change without notice.

Input

Parameter	Conditions	Min.	Typ.	Max.	Units
Input Voltage Range	3.3 VDC Input	2.97	3.3	3.63	VDC
	5 VDC Input	4.50	5.0	5.50	
	12 VDC Input	10.80	12.0	13.20	
	24 VDC Input	21.60	24.0	26.40	
	48 VDC Input	43.20	48.0	52.80	
Input Reflected Ripple Current			20		mA P - P
Input Filter	Internal Capacitor				

Output

Parameter	Conditions	Min.	Typ.	Max.	Units
Output Voltage Accuracy			±3.0		%
Line Regulation	For VIN Change of 1%		±1.2		%
Load Regulation, See Note 1	See Model Selection Guide				
Ripple & Noise (20 MHz)	See Note 2		100		mV P - P
Temperature Coefficient			±0.02		%/°C
Output Short Circuit	Momentary (0.5 Sec.)				

General

Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation Voltage	60 Seconds	1,000			VDC
Isolation Resistance	500 VDC	1,000			MΩ
Isolation Capacitance	100 kHz, 1V		60		pF
Switching Frequency			80		kHz

EMI Characteristics

Parameter	Standard	Criteria	Level
Radiated Emissions	EN 55022		Class A
Conducted Emissions	See Note 3 EN 55022		Class A
ESD	EN 61000-4-2	A	±6 kV/±8kV
RS	EN 61000-4-3	A	10V/m
EFT	See Note 3 EN 61000-4-4	A	±2 kV
Surge	See Note 3 EN 61000-4-5	A	±2 kV
CS	EN 61000-4-6	A	10 Vrms
PFMF	EN 61000-4-8	A	1A/m

Environmental

Parameter	Conditions	Min.	Typ.	Max.	Units
Operating Temperature Range	Ambient	-40		+85	°C
Operating Temperature Range	Case			+100	°C
Storage Temperature Range		-40		+125	°C
Cooling	Free Air Convection				
Humidity	RH, Non-condensing			95	%

Physical

Case Size	See Mechanical Diagram (Page 2)				
Case Material	Non-Conductive Black Plastic (UL-94V0)				
Weight	0.05 Oz (1.5g)				

Reliability Specifications

Parameter	Conditions	Min.	Typ.	Max.	Units
MTBF	MIL HDBK 217F, 25°C, Gnd Benign	1.121			MHours

Absolute Maximum Ratings

Parameter	Conditions	Min.	Typ.	Max.	Units
Input Voltage Surge (1 Sec)	3.3 VDC Input			6.0	VDC
	5 VDC Input			7.0	
	12 VDC Input			15.0	
	24 VDC Input			28.0	
	48 VDC Input			54.0	
Lead Temperature	1.5 mm From Case For 10 Sec			260	°C

Caution: Exceeding Absolute Maximum Ratings may damage the module. These are not continuous operating ratings.

RoHS



MicroPower Direct

292 Page Street
Suite D
Stoughton, MA 02072
USA

T: (781) 344-8226
F: (781) 344-8481
E: sales@micropowerdirect.com
W: www.micropowerdirect.com




www.micropowerdirect.com

Model Number	Input				Output		Load Regulation (% Typ)	Efficiency (% Typ)	Capacitive Load (µF, Max)	Fuse Rating Slow-Blow (mA)
	Voltage (VDC)		Current (mA)		Voltage (VDC)	Current (mA, Max)				
	Nominal	Range	Full-Load	No-Load						
ME103S-03	3.3	2.97 - 3.63	421	25	3.3	303.0	±20	72	220	1,000
ME103S-05	3.3	2.97 - 3.63	394	25	5.0	200.0	±10	77	220	1,000
ME103S-09	3.3	2.97 - 3.63	404	30	9.0	111.0	±10	75	220	1,000
ME103S-12	3.3	2.97 - 3.63	473	45	12.0	100.0	±10	77	220	1,000
ME103S-15	3.3	2.97 - 3.63	384	35	15.0	67.0	±10	79	220	1,000
ME103S-18	3.3	2.97 - 3.63	399	35	18.0	56.0	±10	76	220	1,000
ME103S-24	3.3	2.97 - 3.63	461	53	24.0	50.0	±10	79	220	1,000
ME105S-03	5.0	4.5 - 5.5	257	20	3.3	303.0	±20	78	220	750
ME105S-05	5.0	4.5 - 5.5	247	25	5.0	200.0	±10	81	220	750
ME105S-09	5.0	4.5 - 5.5	250	26	9.0	111.0	±10	80	220	750
ME105S-12	5.0	4.5 - 5.5	300	25	12.0	100.0	±10	80	220	750
ME105S-15	5.0	4.5 - 5.5	244	35	15.0	67.0	±10	82	220	750
ME105S-18	5.0	4.5 - 5.5	247	25	18.0	56.0	±10	81	220	750
ME105S-24	5.0	4.5 - 5.5	289	35	24.0	50.0	±10	83	220	750
ME112S-03	12	10.8 - 13.2	107	15	3.3	303.0	±20	78	220	250
ME112S-05	12	10.8 - 13.2	105	16	5.0	200.0	±10	79	220	250
ME112S-09	12	10.8 - 13.2	107	15	9.0	111.0	±10	78	220	250
ME112S-12	12	10.8 - 13.2	125	15	12.0	100.0	±10	80	220	250
ME112S-15	12	10.8 - 13.2	105	15	15.0	67.0	±10	79	220	250
ME112S-18	12	10.8 - 13.2	104	20	18.0	56.0	±10	80	220	250
ME112S-24	12	10.8 - 13.2	123	25	24.0	50.0	±10	81	220	250
ME124S-03	24	21.6 - 26.4	54	8	3.3	303.0	±20	77	220	150
ME124S-05	24	21.6 - 26.4	52	8	5.0	200.0	±10	80	220	150
ME124S-09	24	21.6 - 26.4	54	7	9.0	111.0	±10	77	220	150
ME124S-12	24	21.6 - 26.4	62	8	12.0	100.0	±10	80	220	150
ME124S-15	24	21.6 - 26.4	51	8	15.0	67.0	±10	81	220	150
ME124S-18	24	21.6 - 26.4	52	8	18.0	56.0	±10	80	220	150
ME124S-24	24	21.6 - 26.4	60	9	24.0	50.0	±10	83	220	150
ME148S-03	48	43.2 - 52.8	29	6	3.3	303.0	±20	73	220	100
ME148S-05	48	43.2 - 52.8	28	6	5.0	200.0	±10	74	220	100
ME148S-09	48	43.2 - 52.8	27	5	9.0	111.0	±10	78	220	100
ME148S-12	48	43.2 - 52.8	32	5	12.0	100.0	±10	77	220	100
ME148S-15	48	43.2 - 52.8	27	5	15.0	67.0	±10	76	220	100
ME148S-18	48	43.2 - 52.8	28	8	18.0	56.0	±10	75	220	100
ME148S-24	48	43.2 - 52.8	31	8	24.0	50.0	±10	80	220	100

Notes:

1. Output load regulation is specified for a load change of 20% to 100%.
2. Operation at no-load will not damage these units. However, they may not meet all specifications.
3. These converters will operate without external components. However, to meet the specified EMI limits, a simple external input filter is required. See the input filter note below for more information.
4. All units are rated for operation at full output power to +85° C. Operation over +85° C without airflow is not recommended. Output power should be derated linearly from 100% at 85° C to 0% at 100° C.
5. It is recommended that a fuse be used on the input of a power supply for protection. See the Model Selection table above for the correct rating.

Input Filter

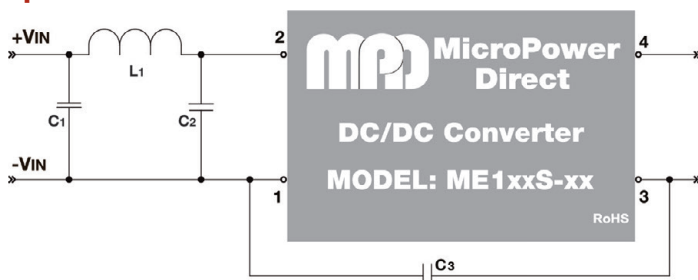


The filter (C1, C2, C3 & L1) shown in the figure above is required to meet EN 55022 level B. Recommended component values are shown in the table at right. Capacitor C1 is a 1210, 100V/ceramic, except for the 48V input which is a 100V/electrolytic. Capacitor C2 is a 1210 100V/ceramic. Capacitor C3 is a 1206 2 kV/ceramic.

VIN (VDC)	C1 (µF)	L1 (µH)	C2 (µF)	C3 (pF)
3.3	2.2	18.0		
5.0	2.2	18.0		
12	2.2	18.0		
24	2.2	18.0	2.2	470
48	10.0	18.0	2.2	470

To meet the requirements of EN 61000-4-4 and EN 61000-4-5, the value of capacitor C1 should be changed to 470 µF/100V.

All components should be mounted as close to the unit as possible.

Mechanical Dimensions

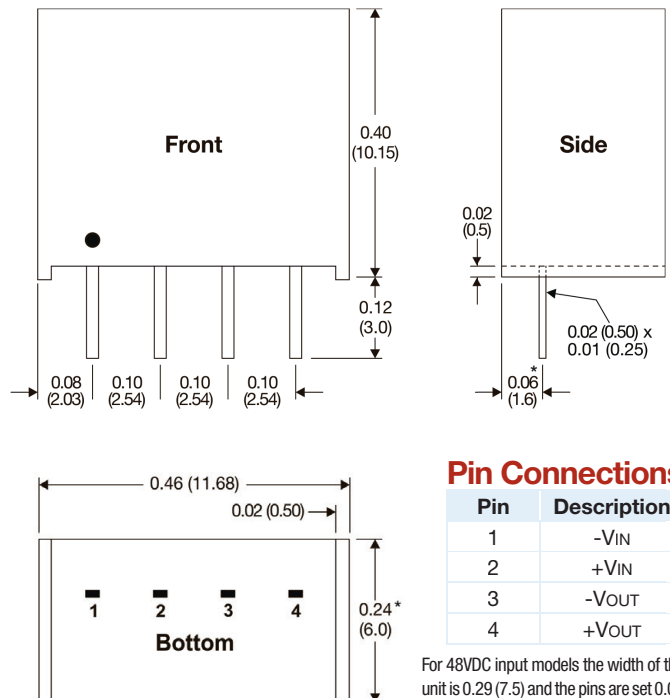

Pin Connections

Pin	Description
1	-VIN
2	+VIN
3	-VOUT
4	+VOUT

For 48VDC input models the width of the unit is 0.29 (7.5) and the pins are set 0.08 (2.0) from the edge of the case. These dimensions are identified with an "*" on the mechanical drawing

Notes:

- All dimensions are typical in inches (mm)
- Tolerance x.xx = ±0.02 (±0.50)
- Pin 1 is marked by a "dot" or indentation on the front of the unit



MicroPower Direct
We Power Your Success - For Less!