

MPU-250F Series

Single Output 250W Power Factor Corrected AC/DC Power Supplies



Key Features:

- Small 250W Supply
- PFC to EN 61000-3-2 "A"
- EN 60950 Approved (UL)
- CE Certified
- FCC Class B Emissions
- 90 to 264 VAC Input
- Internal Fan
- Small 5" x 3.2" x 2" Size



MicroPower Direct

292 Page Street
Suite D
Stoughton, MA 02072
USA

T: (781) 344-8226
F: (781) 344-8481
E: sales@micropowerelect.com
W: www.micropowerelect.com



Electrical Specifications

Specifications typical @ +25°C, nominal input voltage & rated output current, unless otherwise noted. Specifications subject to change without notice.

Input						
Parameter	Conditions	Min.	Typ.	Max.	Units	
Input Voltage Range	Autoranging	90		132	VAC	
		180		264		
Input Frequency		47		63	Hz	
Input Current, Full Load	110 VAC		6		A	
	220 VAC		3			
Inrush Current, Cold Start	110 VAC			35	A	
	220 VAC			70		
Leakage Current	264 VAC			1.0	mA	
Power Factor Correction	Meets EN 61000-3-2 Class A					
Input Protection	T8A/250V Fuse					

Output						
Parameter	Conditions	Min.	Typ.	Max.	Units	
Output Voltage Adjustment	By Trim Pot		±5.0		%	
Output Regulation, See Note 1			±1.0		%	
Hold Time	110 VAC, 80% Load	20			mSec	
Ripple & Noise (20 MHz) See Note 2	See Model Selection Guide					
Overload Protection	Autorecovery	110		140	%	
Over Voltage Protection	>130% of Rated Output Voltage. Recycle AC Input.					
Over Temperature Protection	Autorecovery		+110		°C	
Temperature Coefficient			±0.04		%/°C	
Transient Recovery Time, See Note 4	50% Load Change		2.5		mS	
Transient Response Deviation				5	%	
Overshoot/Undershoot	At Turn On/Off			±5.0	%	
Turn On Delay	230 VAC			1	S	
Output Short Circuit	Continuous With Autorecovery					

General						
Parameter	Conditions	Min.	Typ.	Max.	Units	
Isolation Voltage, See Note 5	Input - Output	3,000			VAC	
	Input - FG (Frame Ground)	1,500				
	Primary - Core	1,500				
Switching Frequency	Fixed		25		kHz	

Interface Signals						
Power Supply On	Green LED on the PCB					
Power Good Signal	Goes TTL high 100 to 500 mS after regulation. Goes low at least 1 mS before the loss of regulation.					
Remote On/Off	A TTL low signal inhibits the output. Hiccup mode.					

Environmental						
Parameter	Conditions	Min.	Typ.	Max.	Units	
Operating Temperature Range	Ambient	0	+25	+70	°C	
Output Derating	2.5%/°C from +50 °C to +70 °C					
Storage Temperature Range		-20		+85	°C	
Cooling	See Model Selection Guide					
Operating Humidity	RH, Non-condensing			90	%	

Reliability Specifications						
Parameter	Conditions	Min.	Typ.	Max.	Units	
MTBF	MIL HDBK 217F, 30°C, Gnd Benign	100			kHours	
Safety Standards	UL 60950, EN 60950					
EMI Compliance	Compliance to EN 55022 (CISPR22) Class B; EN 61000-3-2,3					
EMS Immunity Compliance	EN 61000-4-2,3,4,5,6,11; EN 55024; CE Marked (LVD)					
Vibration	Sinusoidal 5-50 Hz, Acceleration ±7.35 m/s ² on X, Y & Z Axis					

www.micropowerelect.com


Model Number	Output Voltage (VDC)		Output Current (Max. A)	Ripple & Noise (% p-p)	Efficiency (%)
	PreSet	Range			
MPU-250S-12yF	12 VDC	11.0 - 13.8	20.83	±1%	80%
MPU-250S-15yF	15 VDC	14.0 - 15.5	16.66	±1%	80%
MPU-250S-24yF	24 VDC	21.0 - 26.0	10.42	±1%	80%
MPU-250S-48yF	48 VDC	44.0 - 52.0	5.21	±1%	80%

Notes:


- Output regulation includes line & load.
- Ripple & noise is measured from 10 Hz to 20 MHz. Connection to the unit is made with 0.1 µF ceramic & 22 µF electrolytic capacitors connected in parallel.
- Transient recovery is measured to within a 1% error band for a load step change of 50% to 100%.
- Isolation specifications are production HI-Pot tested for 3 seconds.
- The full output range (see table) is covered in the safety agency certification. Standard models are factory set to the "Preset" voltage. This may be set to other levels within the range without affecting the agency certification. For more information, contact the factory.
- Output power is given for the factory preset voltage. The maximum continuous output power level is 300W. All models provide a peak power level of 600W for a maximum duration of 500 µs. For more information, contact the factory.
- Each unit includes an input fuse (250V/8A). Since this fuse is not field replaceable, it is recommended that an external fuse of the same size be used on the input of the power supply for protection.

Model Number

MPU-250S-XXYF

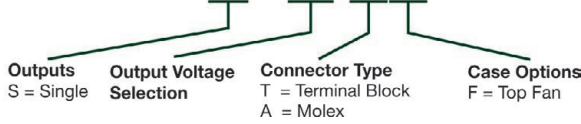

Mechanical Dimensions

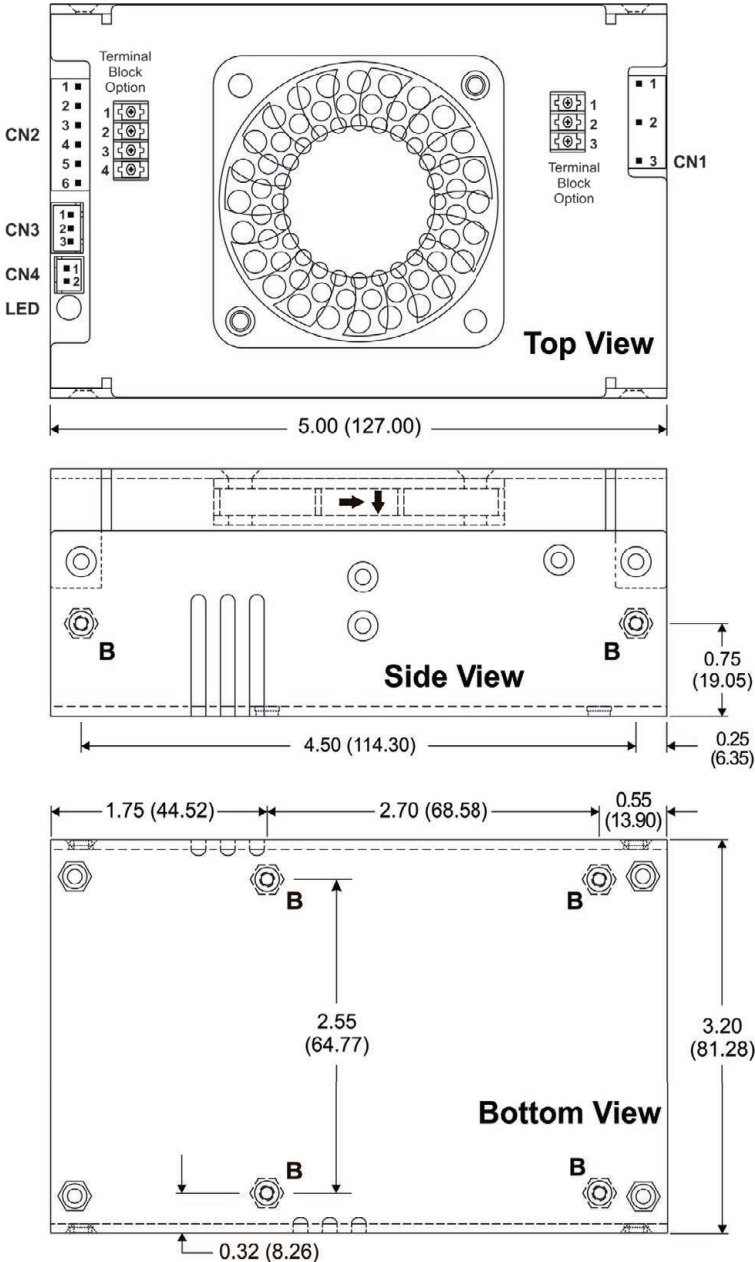

Models with other output voltage levels are available (i.e. 5 VDC, 30 VDC, etc)
 Contact the factory for details at:
sales@micropowerdirect.com

Connections

Input Connector (CN1):

- Terminal Block: Howder HD-601-3P
3 pins, 6.35 mm Centers
- Molex Mating Part No: Molex 09-91-0500 or equivalent (two pins removed)

Pin	Function
1	AC-Line
2	AC-Neutral
3	Field Ground

Output Connector (CN2):

- Terminal Block: Howder HD-601-4P
4 pins, 6.35 mm Centers
- Molex Mating Part No: Molex 09-91-0600 or equivalent


Pin	Molex	Pin	Howder
1	+V _{OUT}	1	+V _{OUT}
2	+V _{OUT}	2	+V _{OUT}
3	+V _{OUT}	3	-V _{OUT}
4	-V _{OUT}	4	-V _{OUT}
5	-V _{OUT}		
6	-V _{OUT}		

Logic Signal Connector (CN3):

- Mating Part No: JST XHP-3 or equivalent (CHYAO SHIUNN JS-2001-03)
- Mating Pins: JST SXH-002T-P0.6 For AWG 30 to 26

Pin	Function
1	Power Good
2	Remote On/Off
3	Common

Mounting Inserts (B): M3 x 0.5



Notes:

- All dimensions are typical in inches (mm)
- Tolerance x.xx = ±0.02 (±0.50)



MicroPower Direct
 We Power Your Success - For Less!